




H:5-8m



安装角度可调节, 范围为: 0-90°
Angle adjustable, between 0-90°.

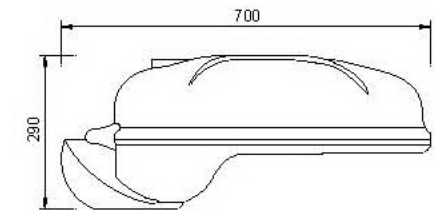

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
20001	E40	HST	250/400W

IP65

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为5-8m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 5-8m.
- IP65



H:6-10m

3441
HST 250/400W

■ 材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 6-10m.
- IP65



H:5-8m

3441
HST 250/400W

■ 材质及特性


- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为5-8m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 5-8m.
- IP65





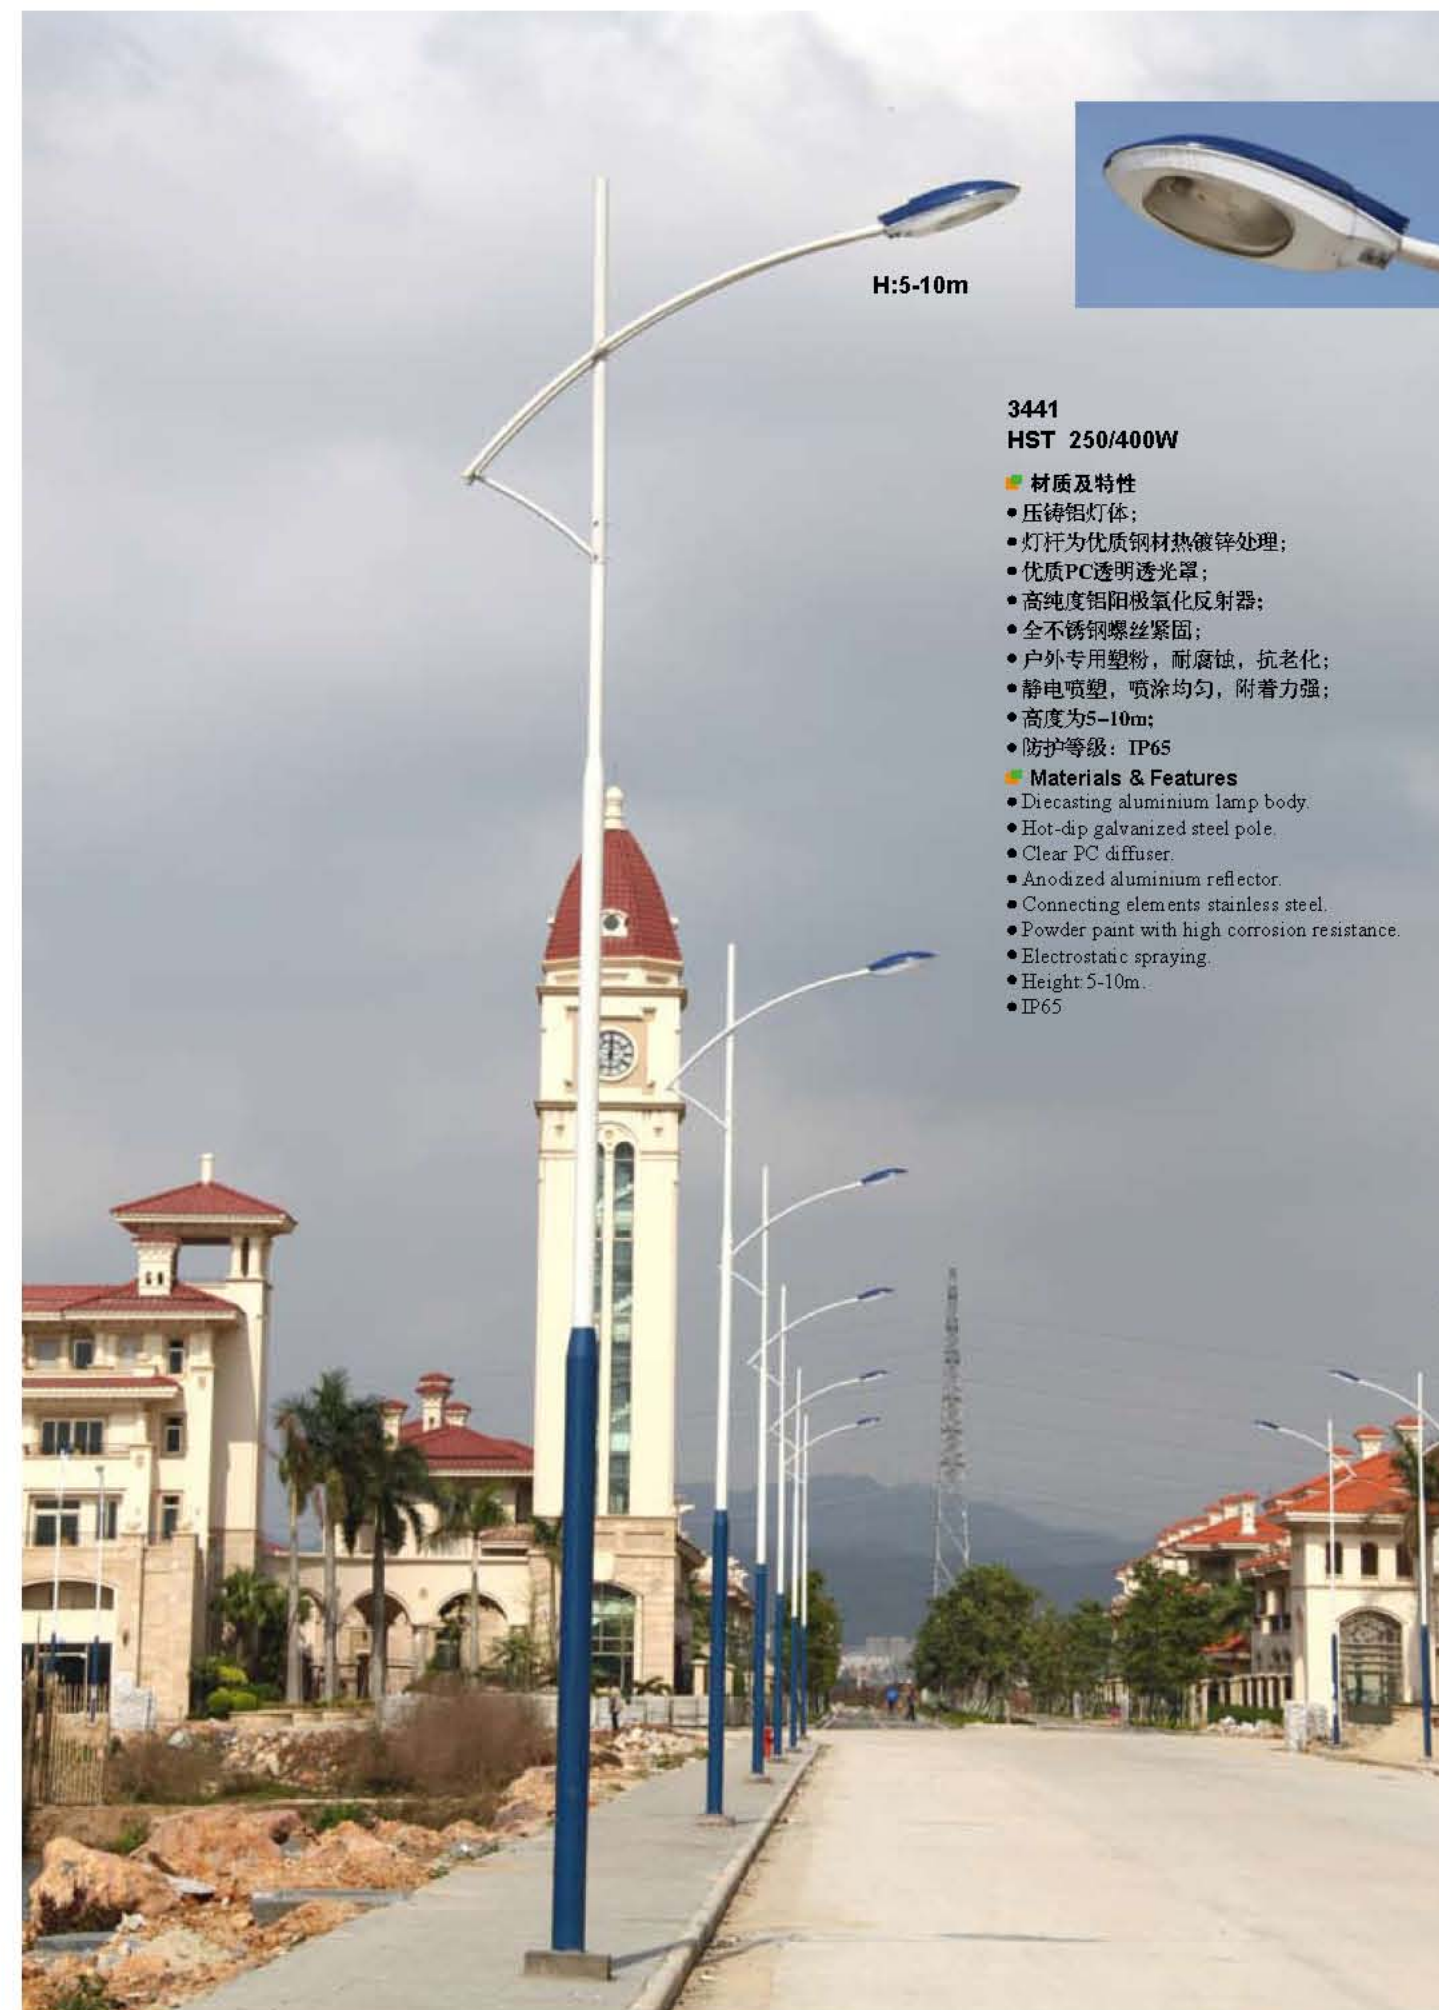

3441
HST 250/400W

■ 材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为5-10m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 5-10m.
- IP65

H:5-10m



3441
HST 250/400W

■ 材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为5-10m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 5-10m.
- IP65

H:5-10m





3441
HST 250/400W

■ 材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 6-10m.
- IP65



3441
HST 250/400W

■ 材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 6-10m.
- IP65



3441

HST 250/400W

■ **材质及特性**

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

■ **Materials & Features**

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 6-10m.
- IP65



3441

HST 250/400W

■ **材质及特性**

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

■ **Materials & Features**

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 6-10m.
- IP65



H:6-10m

3441 HST 150W

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 6-10m.
- IP65

3441

HST 180W

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-8m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 6-8m.
- IP65

H:6-8m





3441
HST 96W

■ 材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 6-10m.
- IP65

H:6-10m



3441
HST 120W


■ 材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为6-10m;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 6-10m.
- IP65


H:6-10m

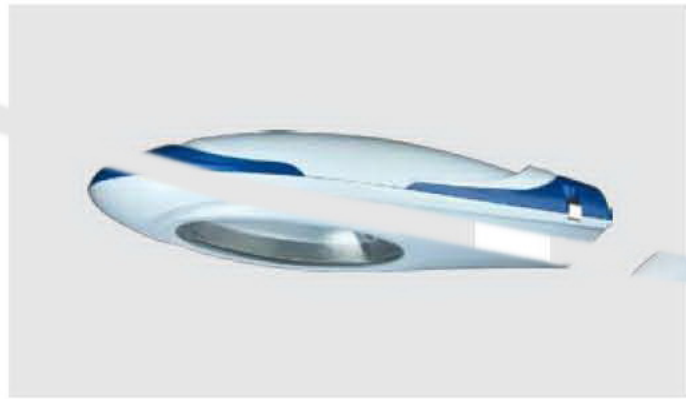

YDL5555



YDL5555

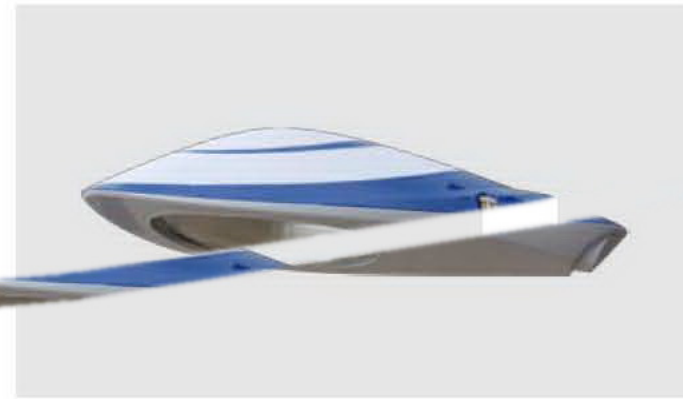

YDL5555



YDL5555



YDL5555



YDL5555




YDL5555



YDL5555



YDL5555

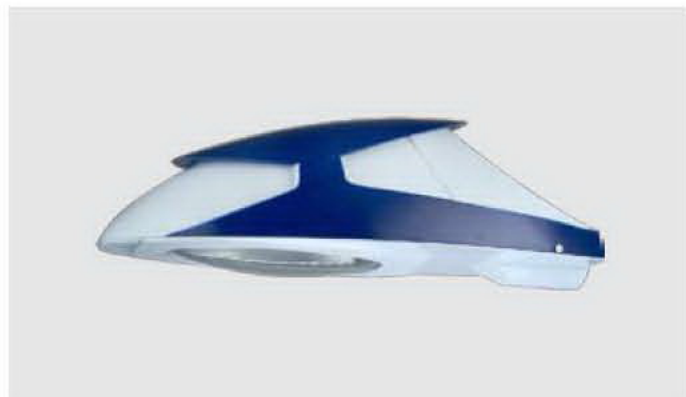

YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555




YDL5555



YDL5555



YDL5555

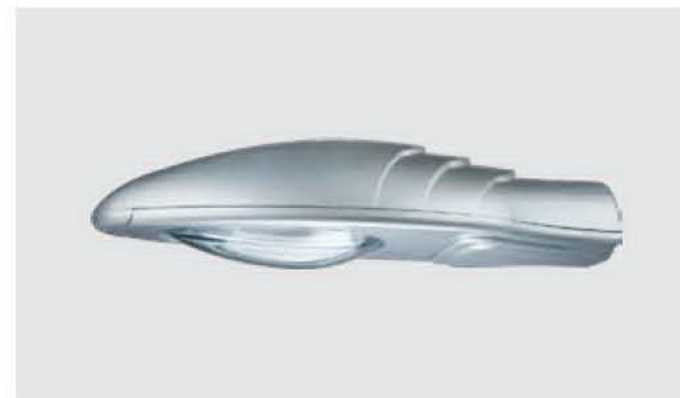

YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555



YDL5555




YDL5555




YDL5555



YDL5555

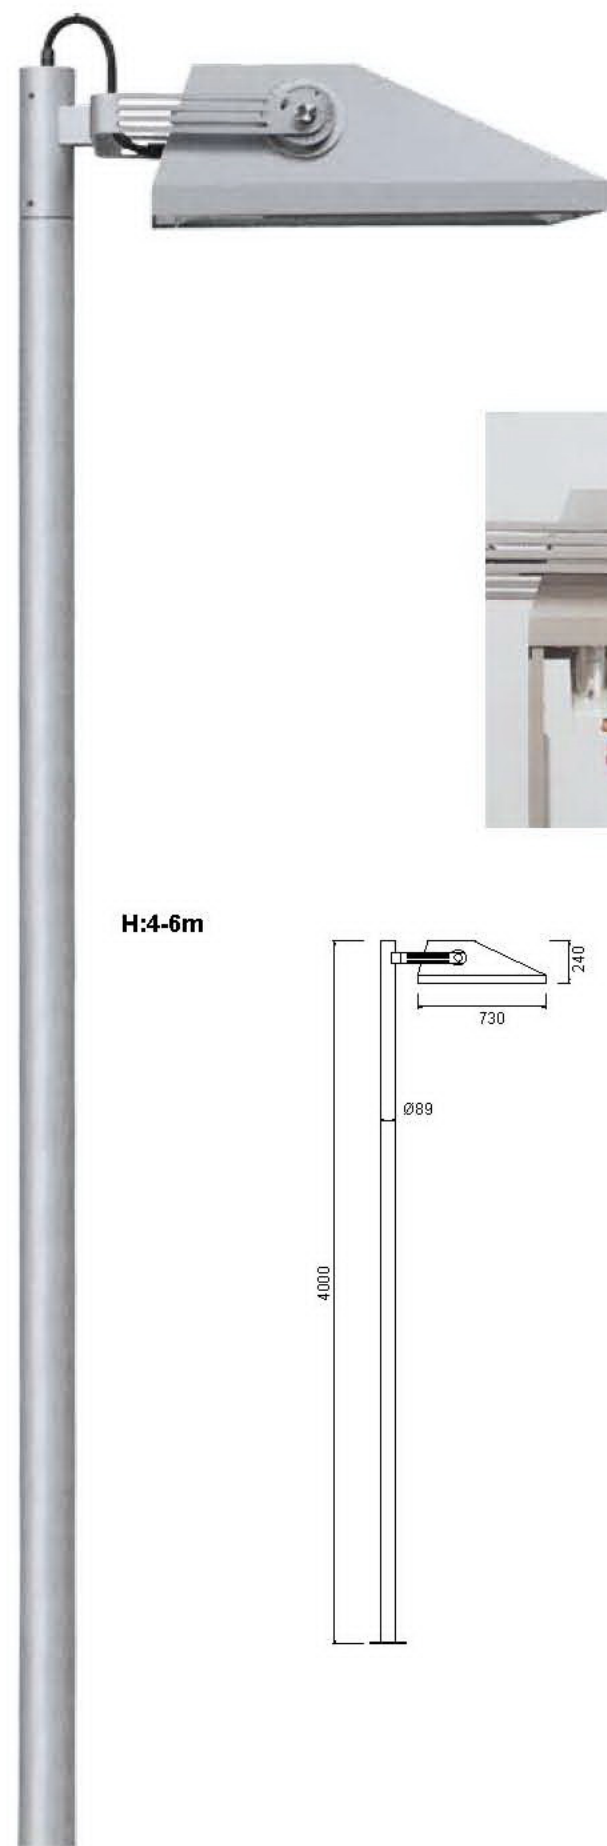

H:4-6m

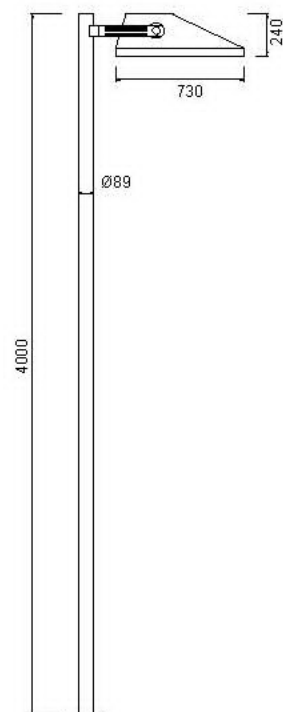

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W


IP65

材质及特性



- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为4-6m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 4-6m.
- IP65

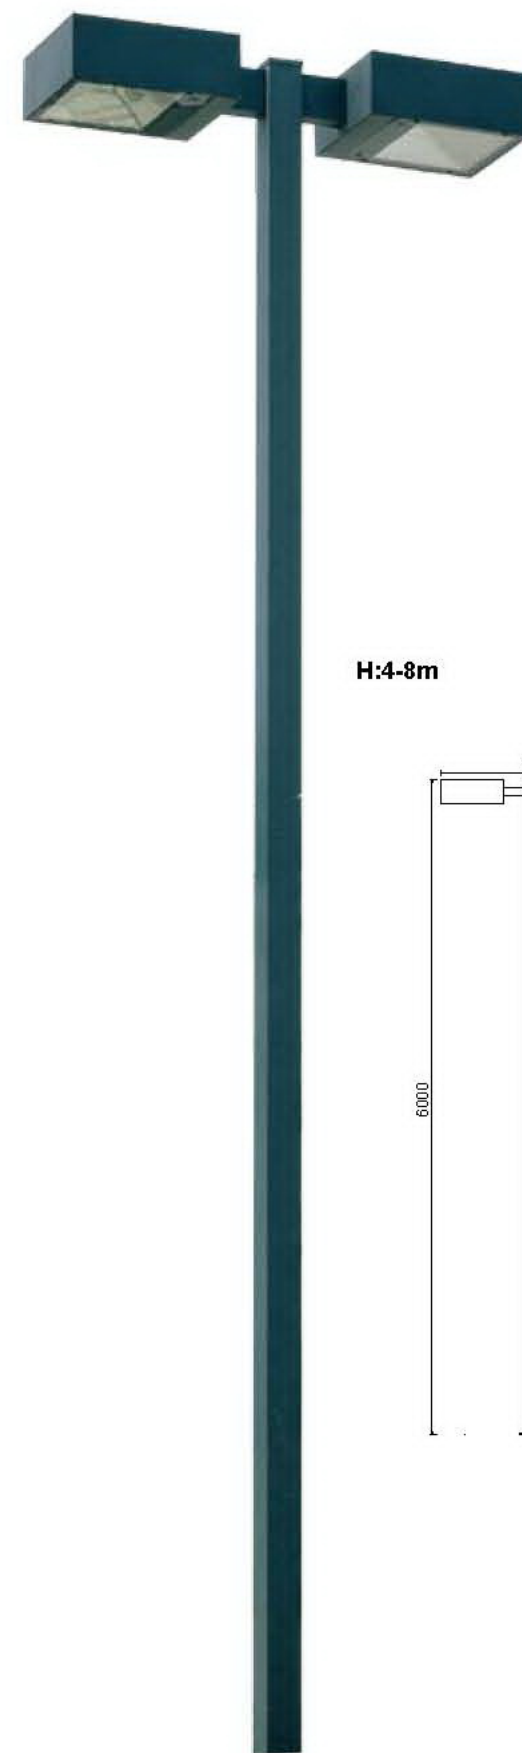

H:4-8m

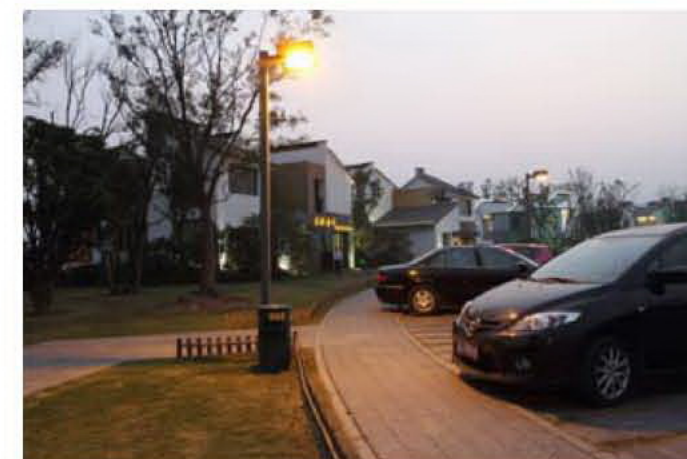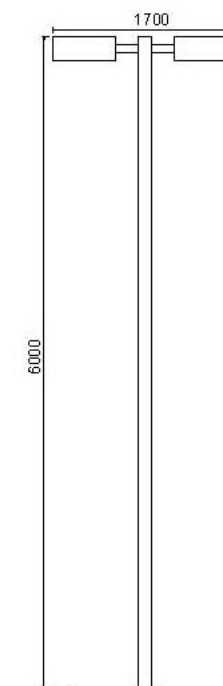

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W

IP65

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为4-8m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 4-8m.
- IP65



YDL5555



YDL5555




YDL5555

YDL5555

YDL5555

H:4-6m

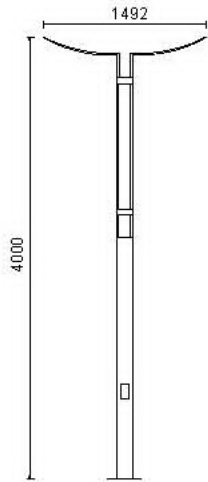

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W

IP65

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉,耐腐蚀,抗老化;
- 静电喷塑,喷涂均匀,附着力强;
- 高度为4-6m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 4-6m.
- IP65

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	G5	T5	21W
	E27		Max.65W

IP65

材质及特性


- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃或优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉,耐腐蚀,抗老化;
- 静电喷塑,喷涂均匀,附着力强;
- 高度为4-6m;
- 防护等级: IP65

Materials & Features


- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 4-6m.
- IP65



H:4-6m

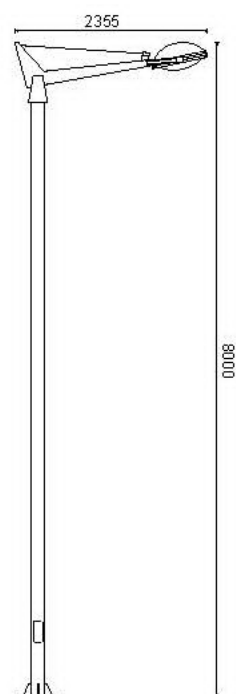

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W



材质及特性


- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PC透明透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为4-6m;
- 防护等级: IP65

Materials & Features


- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 4-6m.
- IP65



H:4-6m

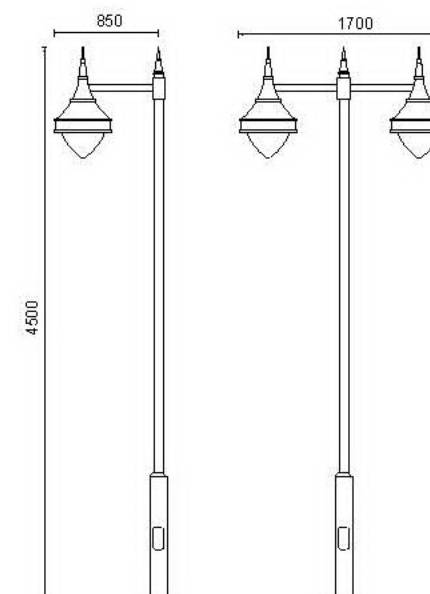

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W



材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质PMMA奶白透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为4-6m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Opal PMMA diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 4-6m.
- IP65



YDL5555

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W


IP65

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为5-8m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 5-8m.
- IP65

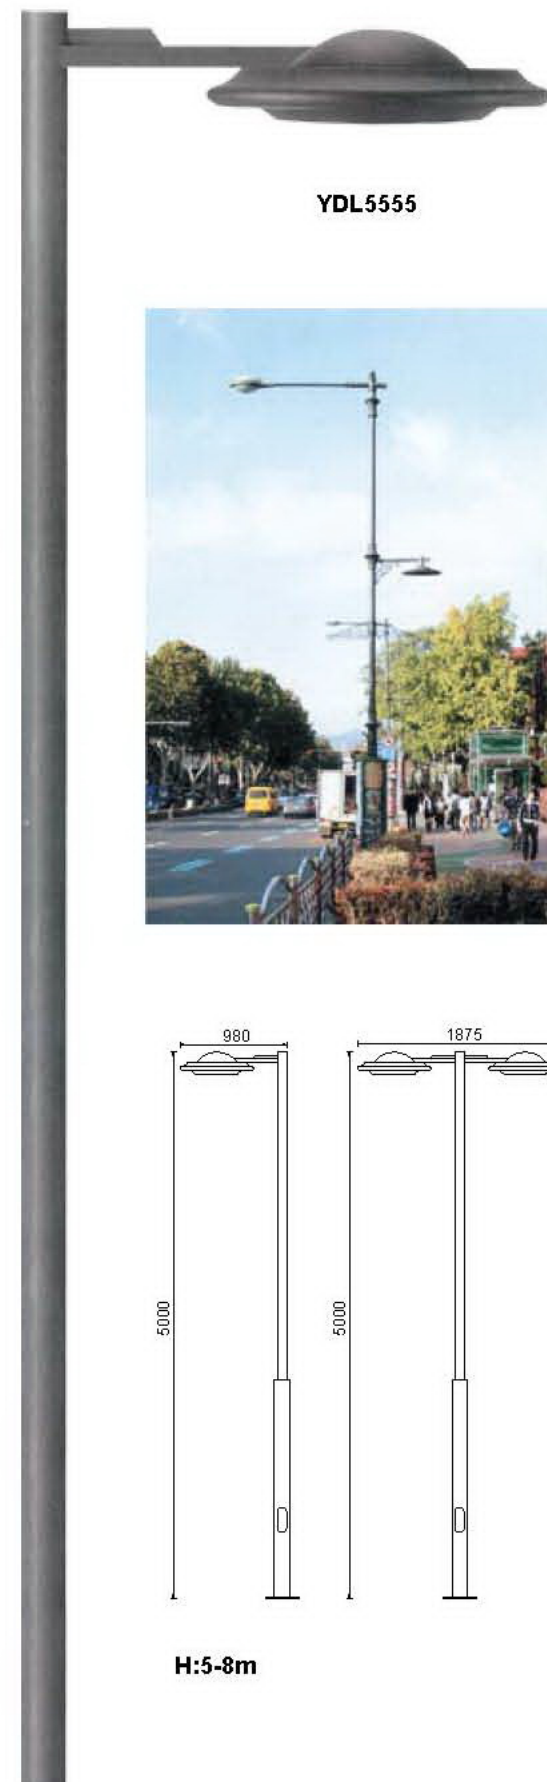

H:5-8m

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W


IP65

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为5-8m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 5-8m.
- IP65

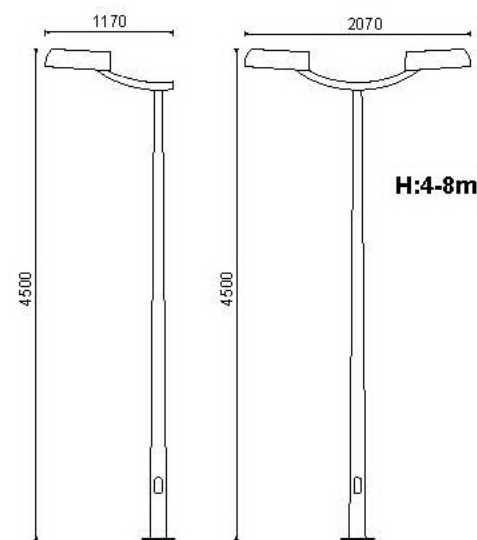

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W

IP65

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为4-8m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 4-8m.
- IP65



型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W

IP65

材质及特性

- 压铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为5-8m;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 5-8m.
- IP65





YDL5555



YDL5555



YDL5555



YDL5555



YDL5555

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E40	HST	250/400W
	E40	HST	250/400W
	E40	HST	250/400W
	E40	HST	250/400W

IP44

材质及特性

- 铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 优质透明PC透光罩;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为8m;
- 防护等级: IP44

Materials & Features

- Sand casting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear PC glass diffuser.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height 8m.
- IP44



YDL5555
H:4m



YDL5555
H:4m



YDL5555
H:4m



YDL5555
H:4m

■ 材质及特性

- 优质不锈钢灯体;
- 优质PMMA奶白透光罩;
- 全不锈钢螺丝紧固;
- 可安装36W节能灯;
- 防护等级: IP44

■ Materials & Features

- Stainless steel lamp body.
- Opal PC diffuser.
- Connecting elements stainless steel.
- Suitable for Max. 36W energy saving lamp.
- IP44



■ 材质及特性

- 优质钢材灯体，热镀锌处理；
- 优质PMMA奶白透光罩；
- 全不锈钢螺丝紧固；
- 可安装65W节能灯；
- 防护等级：IP44


■ Materials & Features

- Hot-dip galvanized steel lamp body.
- Opal PC diffuser.
- Connecting elements stainless steel.
- Suitable for Max. 65W energy saving lamp.
- IP44




YDL5555
H:8-12m



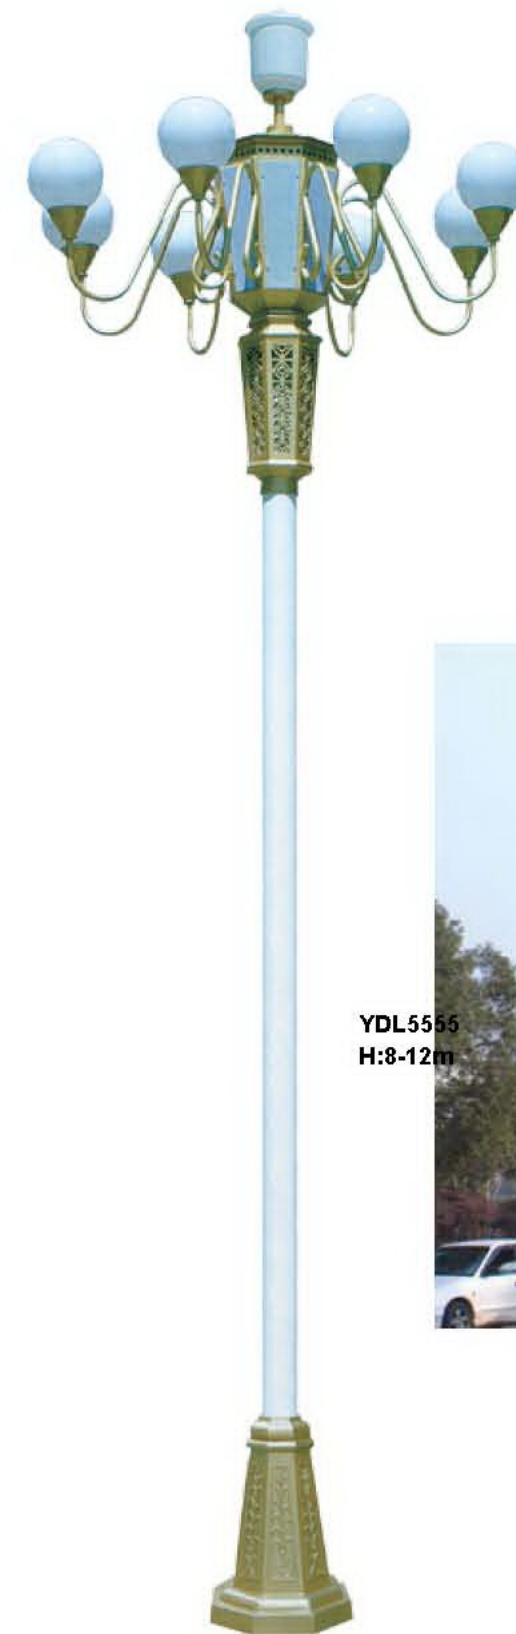

YDL5555
H:8-12m

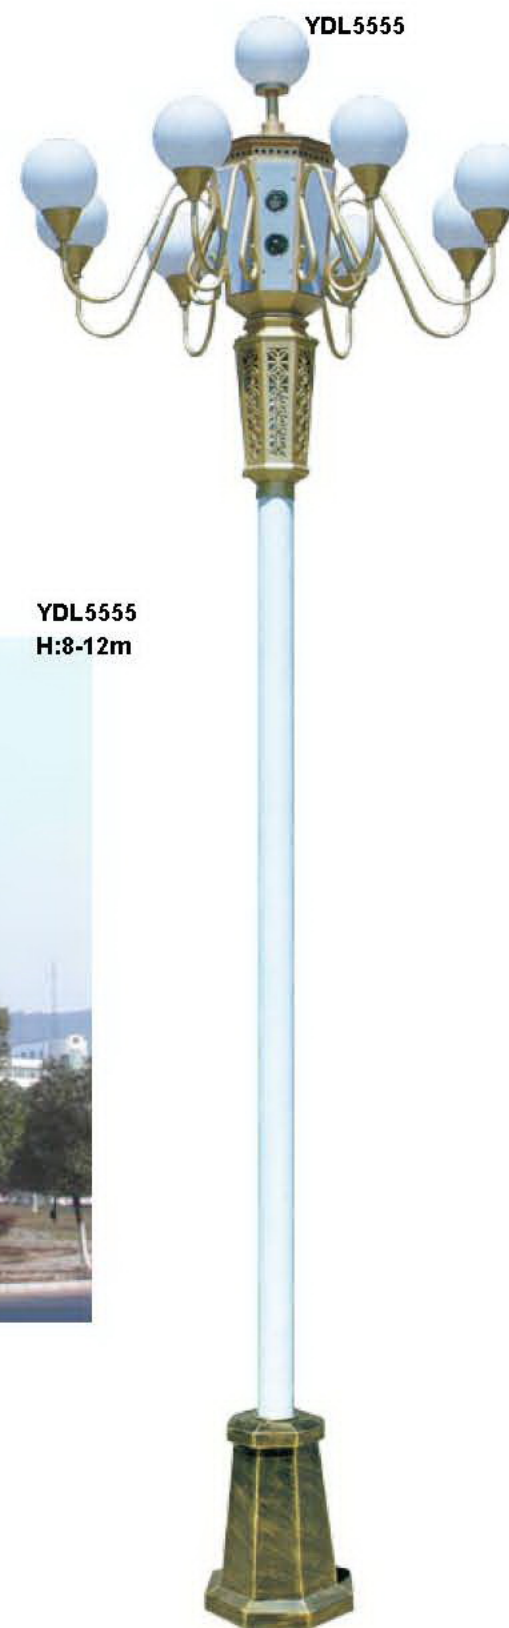

YDL5555
H:8-12m



YDL5555
H:25m

■ 材质及特性

- 铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为25m;
- 可安装HST光源, Max.2000W;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 25m.
- Suitable for HST, Max. 2000W.
- IP65



YDL5555
H:18m

■ 材质及特性

- 铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为25m;
- 可安装HST光源, Max.200W;
- 防护等级: IP65

■ Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 25m.
- Suitable for HST, Max. 200W.
- IP65

材质及特性

- 铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为18-35m;
- 可安装HST光源, Max.200W;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 18-35m.
- Suitable for HST, Max. 200W.
- IP65

YDL5555
H:18-35m



材质及特性

- 铸铝灯体;
- 灯杆为优质钢材热镀锌处理;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 高度为25m;
- 可安装HST光源, Max.2000W;
- 防护等级: IP65

Materials & Features

- Diecasting aluminium lamp body.
- Hot-dip galvanized steel pole.
- Clear tempered glass diffuser.
- Anodized aluminium reflector.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- Height: 25m.
- Suitable for HST, Max. 2000W.
- IP65

YDL5555
H:18-35m

