



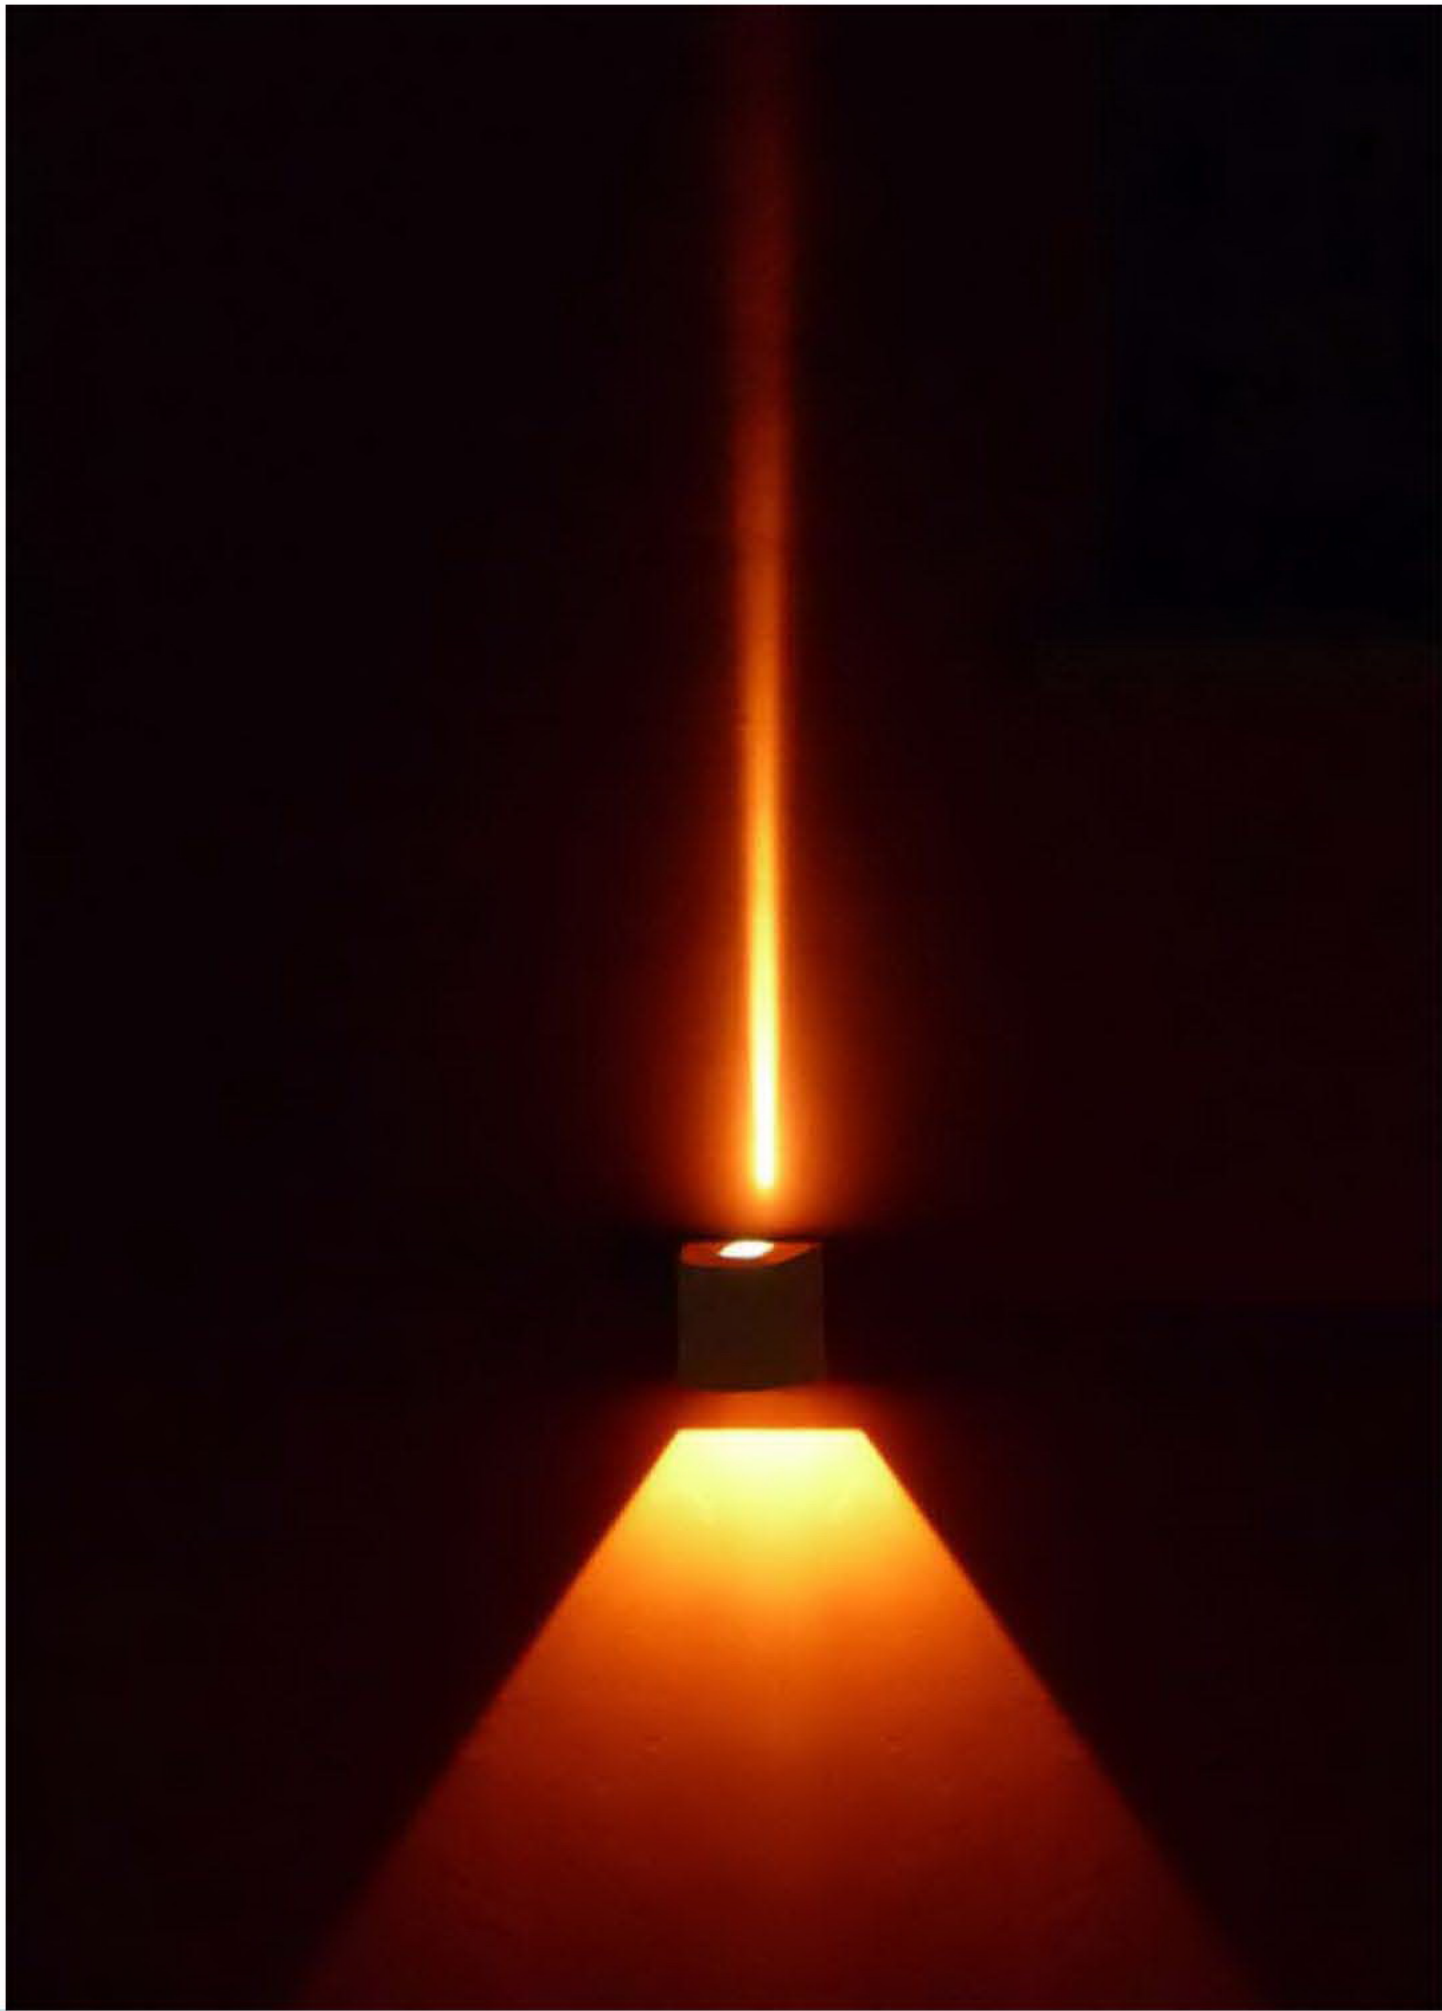

4829

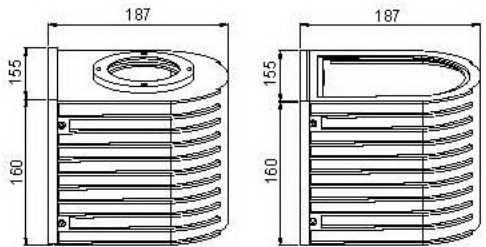

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4829	E27	JDD 100W	

IP54

■ 材质及特性

- 压铸铝合金灯体;
- 透明聚光透镜和平板钢化玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

■ Materials & Features

- Diecasting aluminum lamp body.
- Transparent light-gathering and flat tempered glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54





4106L







4107L







4108L



4109L



中号系列 (M)



大号系列 (L)

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4106L	2*G23		2*11W
4107L	2*G24d-1		2*26W
4108L	GR10q	2D	38W

IP54

材质及特性


- 压铸铝合金灯体;
- 奶白PC透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features


- Diecasting aluminum lamp body.
- Opal PC diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



YDC55555



YDC55555



型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E27		Max.13W
	E27		Max.8W

IP54 CE V

材质及特性

- 压铸铝合金灯体;
- 奶白PC透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features


- Diecasting aluminum lamp body.
- Opal PC glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



YDC55555



YDC55555

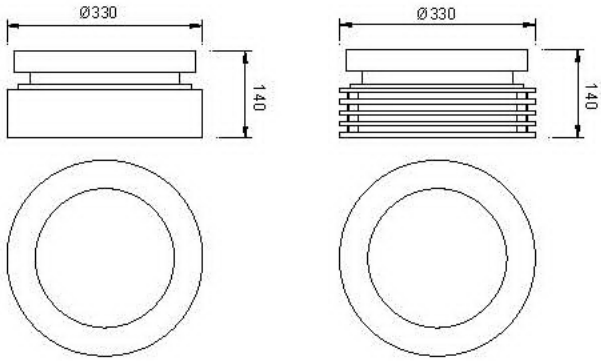

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E27		Max.26W
	E27		Max.26W

IP54 CE V

材质及特性


- 压铸铝合金灯体;
- 奶白PC透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Opal PC glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



6155

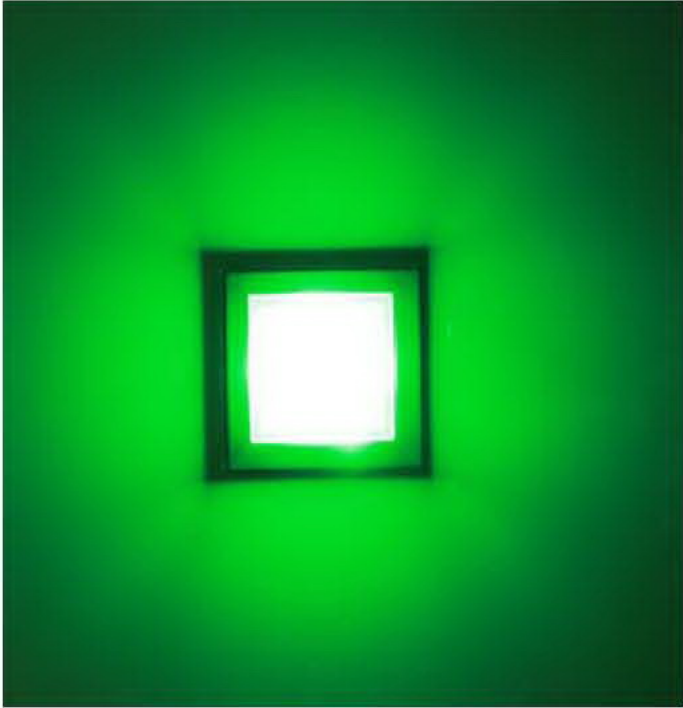

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
6155	LED	1*3W	90-260V/50Hz
	G9	50W	220-240V/50Hz


IP54

材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Frost glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

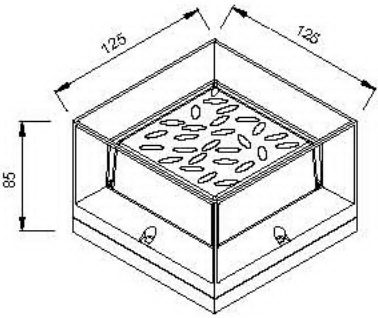

3052

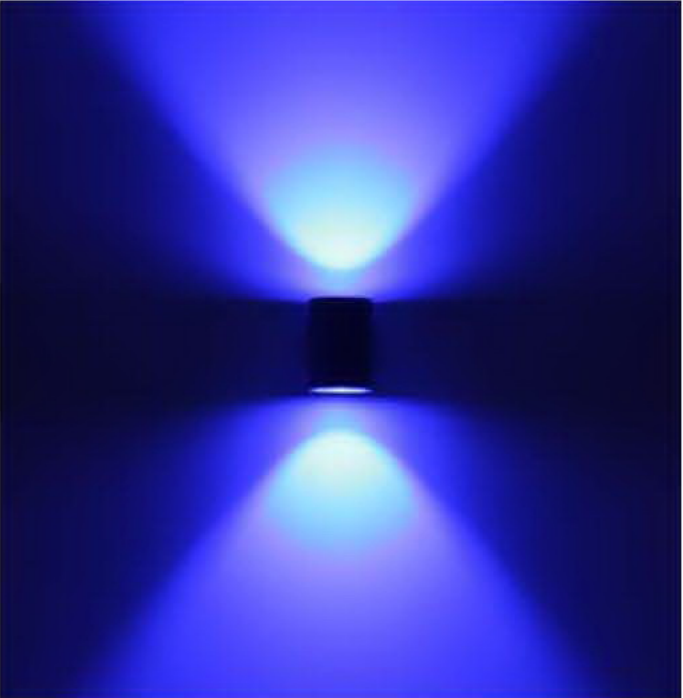

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3052	LED	1*3W	90-260V/50Hz
	G9	50W	220-240V/50Hz


IP54

材质及特性

- 铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54






YDC55555



YDC55555

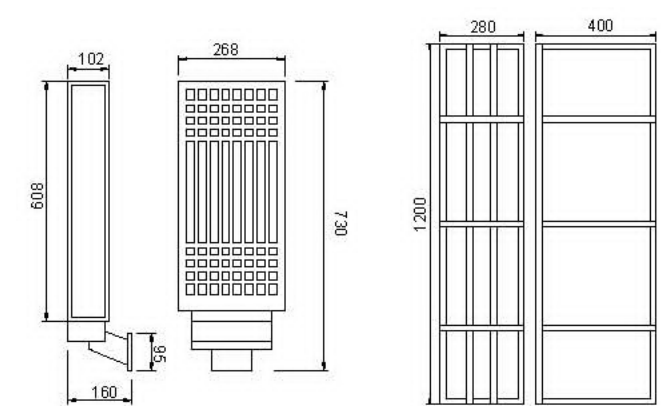

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	4*G5	2*T5	21W
	8*G5	4*T5	28W


IP54

材质及特性


- 压铸铝合金灯体;
- 奶白PC透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Opal PC glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

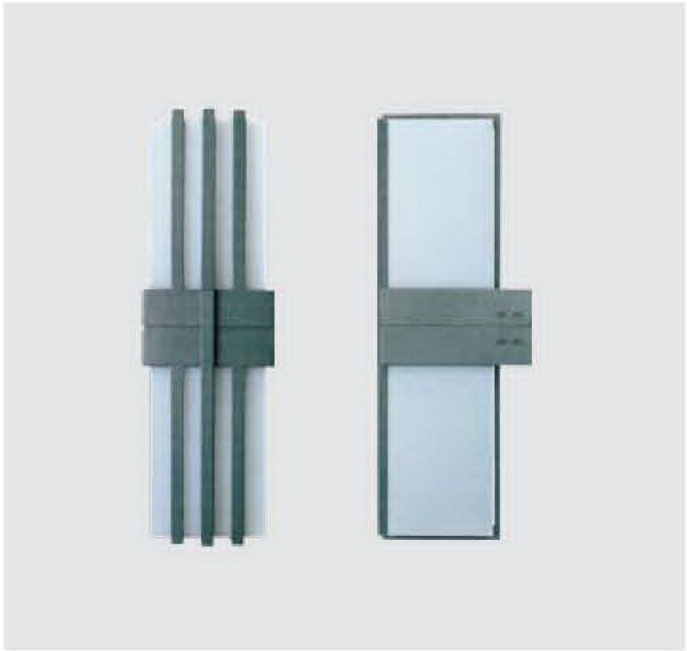

YDC55555

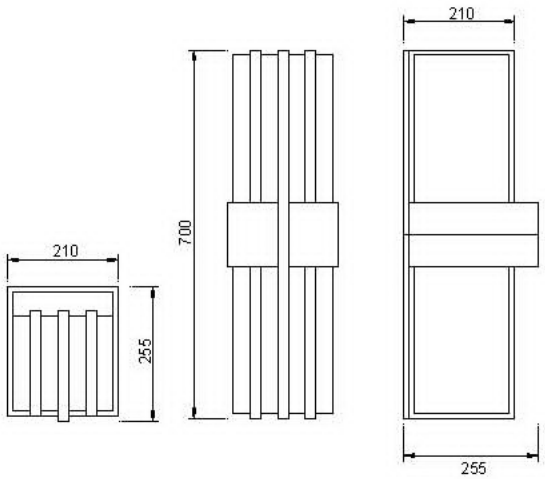

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	4*G5	2*T5	21W


IP54

材质及特性

- 压铸铝合金灯体;
- 奶白PC透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features





- Diecasting aluminum lamp body.
- Opal PC glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

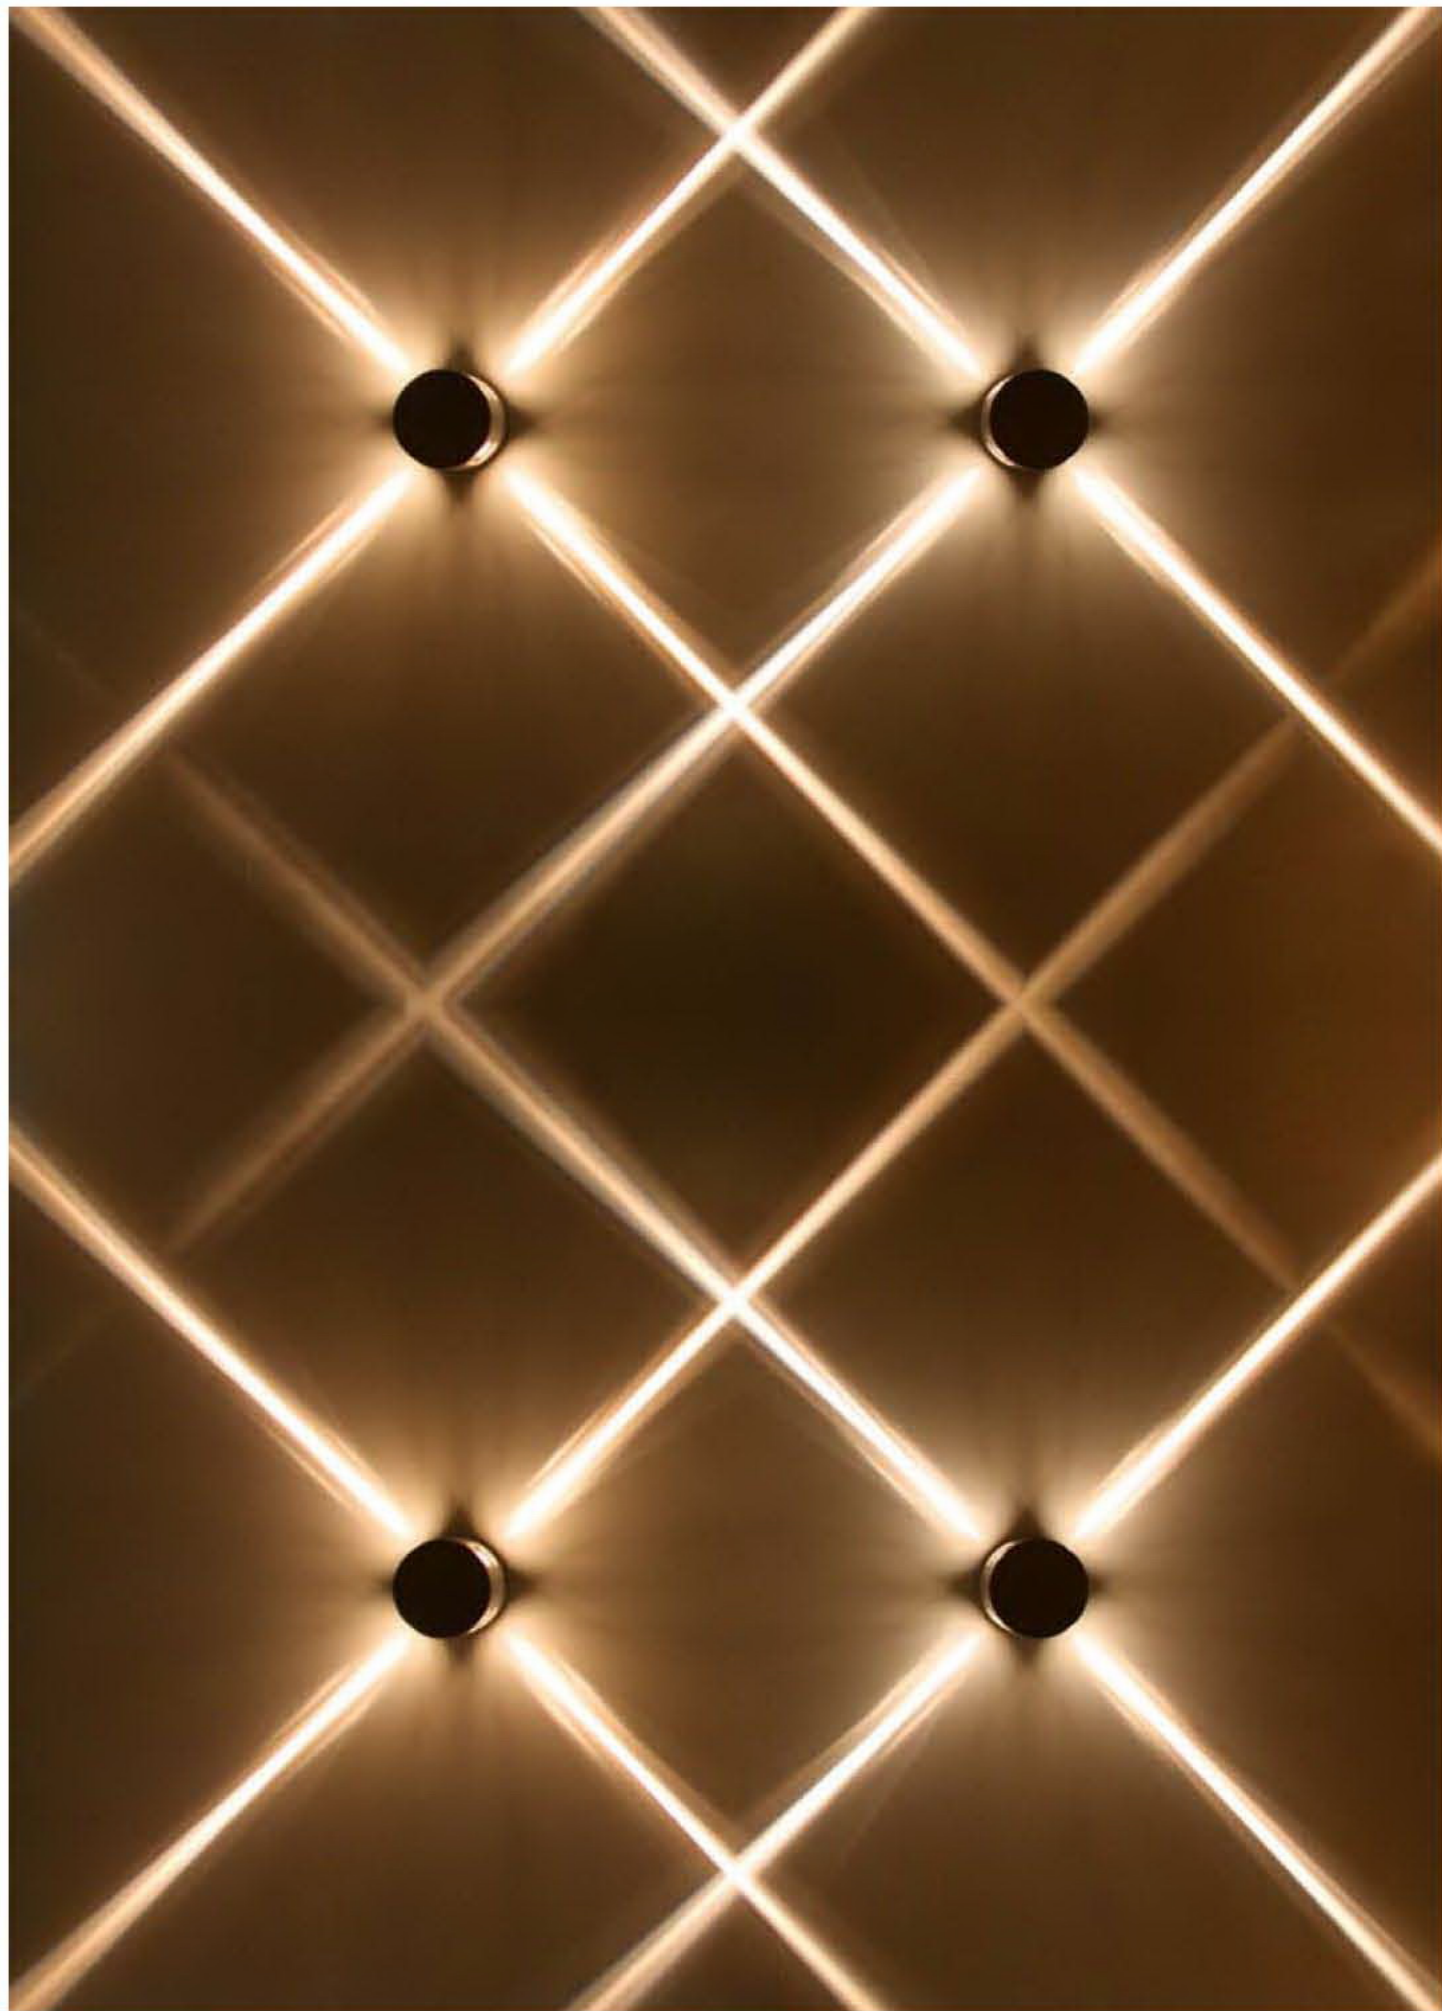

7271



7278

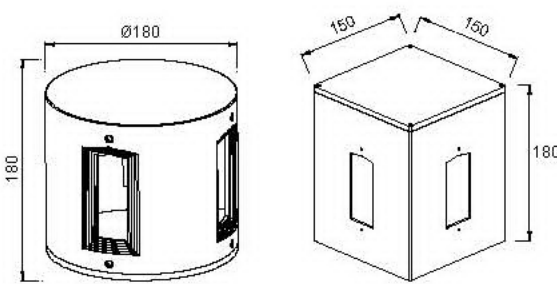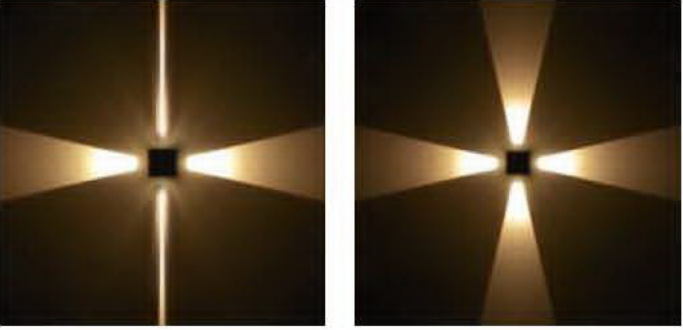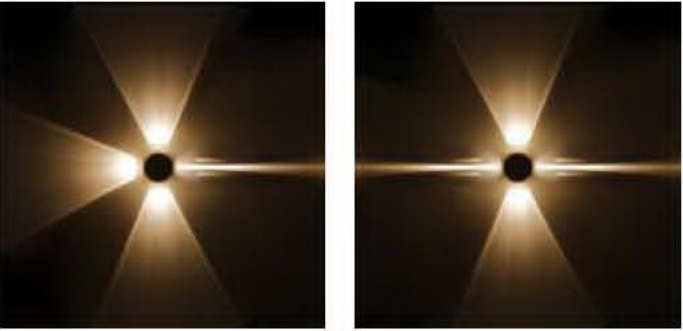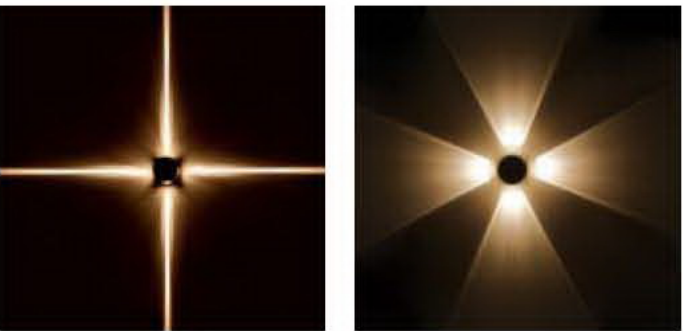

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
7271	E27	JDD	100W
7278	G12		70/150W

IP54

材质及特性




- 压铸铝合金灯体;
- 透明聚光或散光透镜透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Clear glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



YDC55555

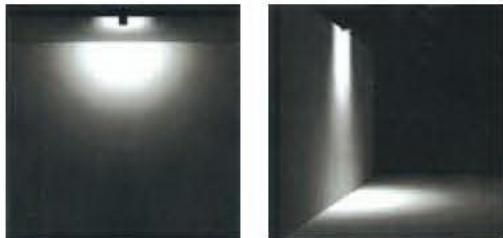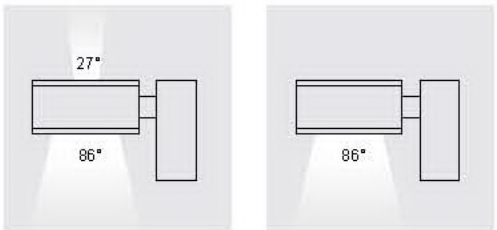

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	G12		70/150W

IP54

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features


- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



7000



7000S

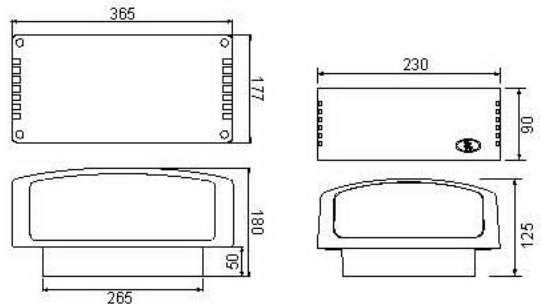

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
7000	Rx7s		70/150W
7000S	G24d-1		18W

IP54

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



4806



4806L

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4806	G5.3		35W
4806L	G23		5W


IP54

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features



- Diecasting aluminum lamp body.
- Clear tempered glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

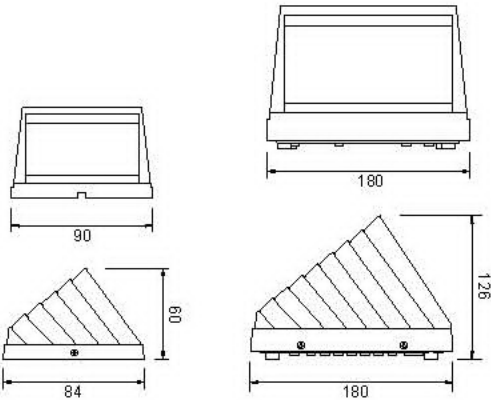

YDC55555



YDC55555

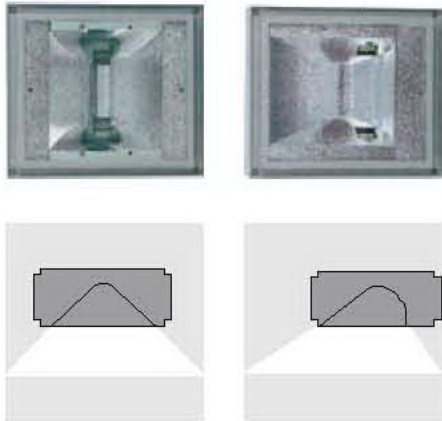

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	Rx7s		70/150W
	Rx7s		70/150W

IP54

材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features


- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54




YDC55555

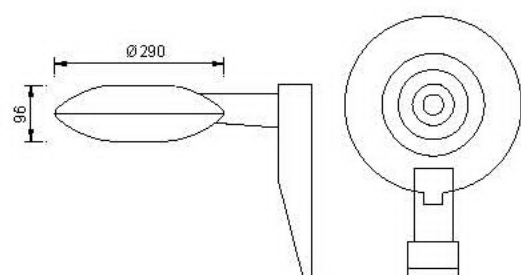

4830

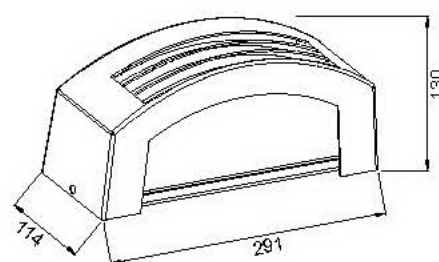

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
		LED	10W
4830	E27		Max.26W



■ 材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

■ Materials & Features


- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54




YDC55555

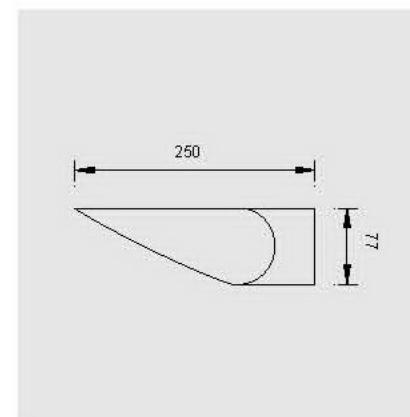


YDC55555

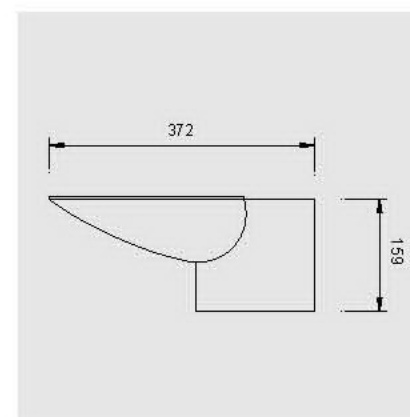

YDC55555

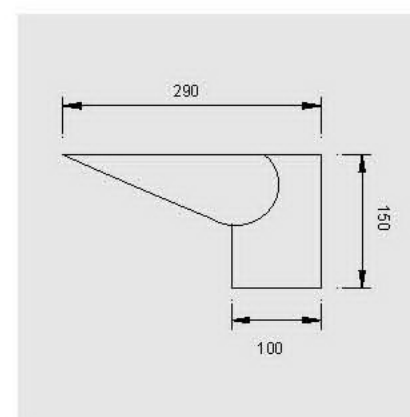

YDC55555

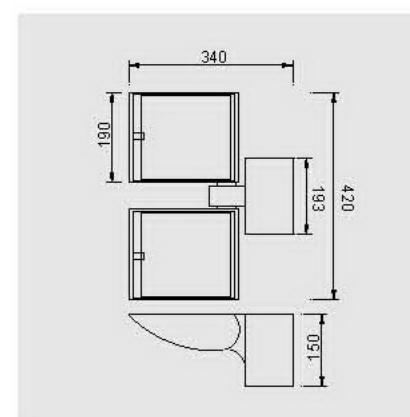



YDC55555





YDC55555



4831



4832

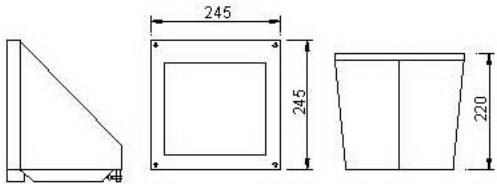

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	Rx7s		70W
	G12		70W





材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

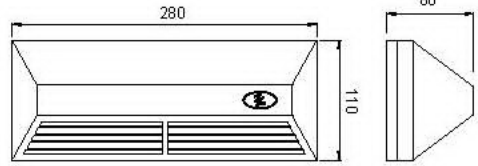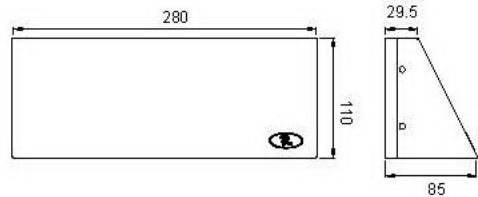

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4831	G23		11W
4832	G23		11W



材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54





027493S






027493L



5663



6111W

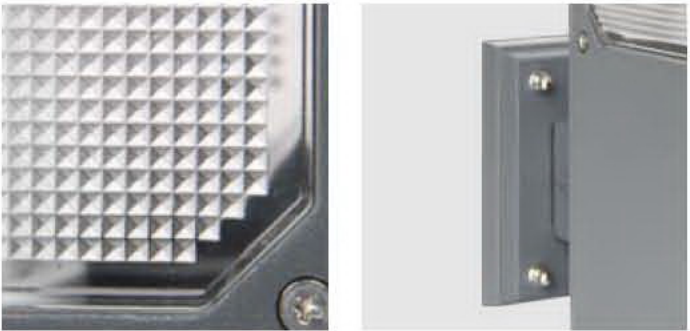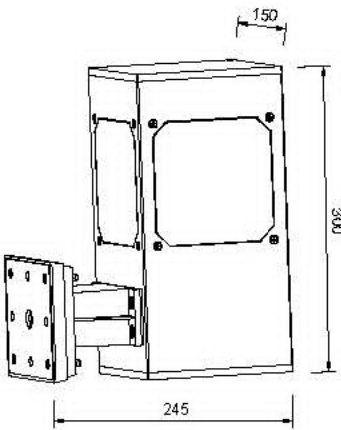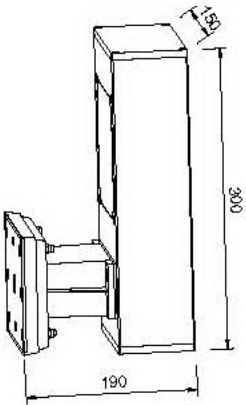

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
027493S	E27		Max.26W
027493L	E27		Max.26W



IP54

材质及特性

- 铝合金灯体;
- PC透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Aluminum lamp body.
- PC diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

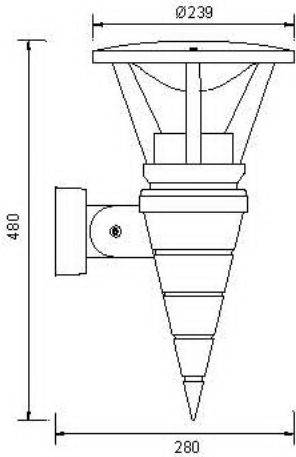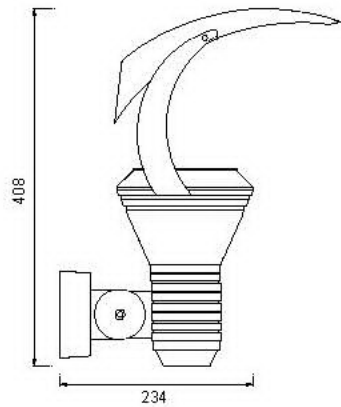

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
5663	E27		Max.26W
	E27	Par38	80W
6111W	G5.3	MR16	50W
	GU10	GU10	50W

IP54

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



YDC55555



YDC55555



YDC55555

YDC55555



YDC55555



型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E27		Max.26W
	E27		Max.26W
	G5.3	MR16	50W



IP54

材质及特性

- 铝合金灯体;
- 磨砂玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Aluminum lamp body.
- Frost glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

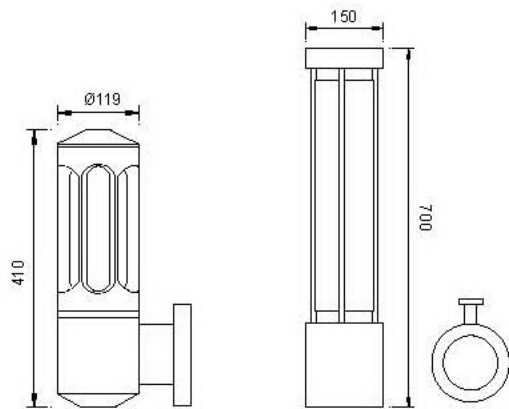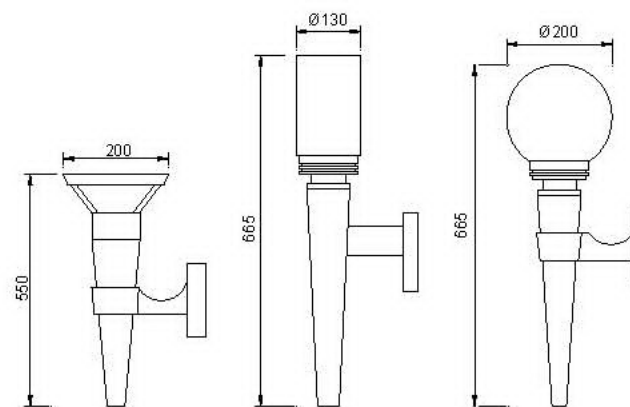

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	E27		Max.26W
	E27		Max.26W

IP54

材质及特性

- 铝合金灯体;
- 磨砂玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Aluminum lamp body.
- Opal glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54





7664



7661



7662



7663



7664

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
7661	E14		Max.7W
7662	E27		Max.13W
7663	E27		Max.26W
7664	E27		Max.26W



IP54

材质及特性


- 铝合金灯体;
- 磨砂玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Aluminum lamp body.
- Frost glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

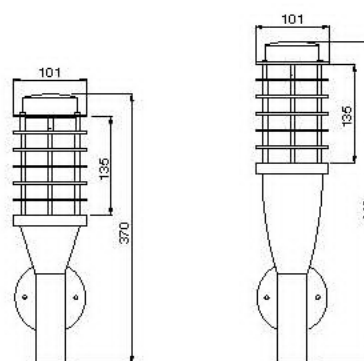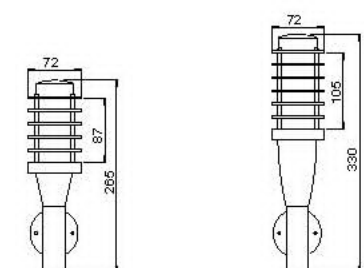

4191

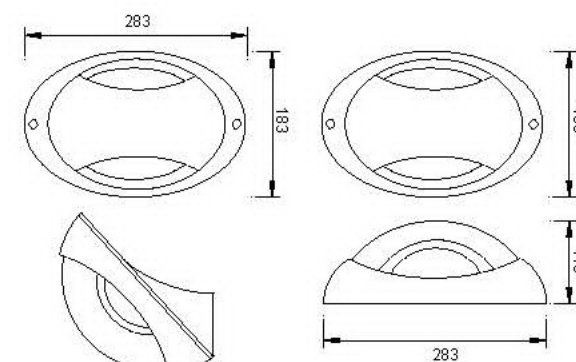

4192



型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4191	E27		Max.26W
4192	E27		Max.26W

IP54

材质及特性


- 铝合金灯体;
- 透明玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Aluminum lamp body.
- Clear glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



7095

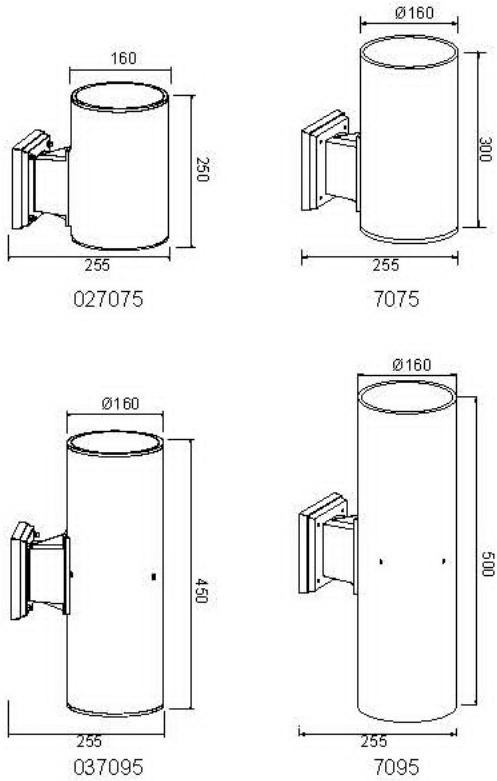

7075




G12



Rx7s



047492L

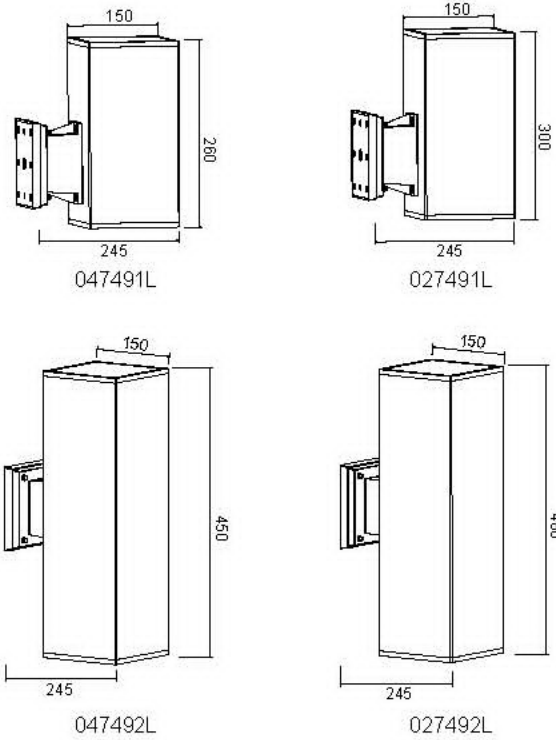

047492L



G12



Rx7s

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
027075	G12		70W
7075	Rx7s		70W
037095	2*G12		2*70W
7095	2*Rx7s		2*70W
027491L	G12		70W
047491L	Rx7s		70W
027492L	2*G12		2*70W
047492L	2*Rx7s		2*70W

IP54

材质及特性



- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



4508+B

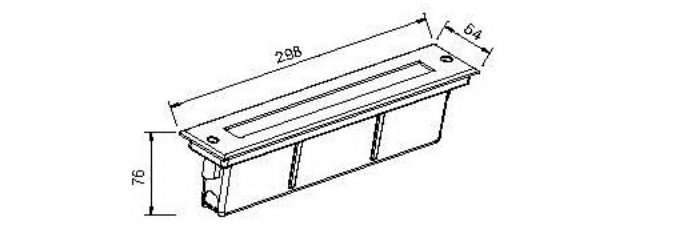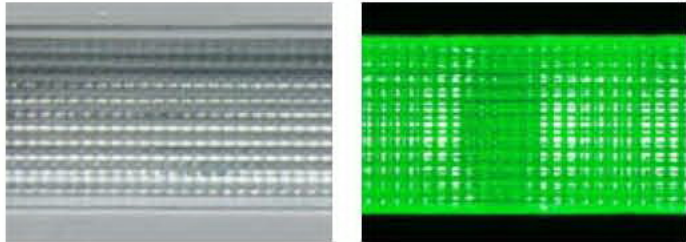

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
	LED	9*0.5W	90-260V/50Hz


IP65

材质及特性


- 压铸铝合金灯体;
- PMMA透光罩;
- 工程塑料预埋筒;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Clear diffuser.
- Engineering plastic recessed box.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65

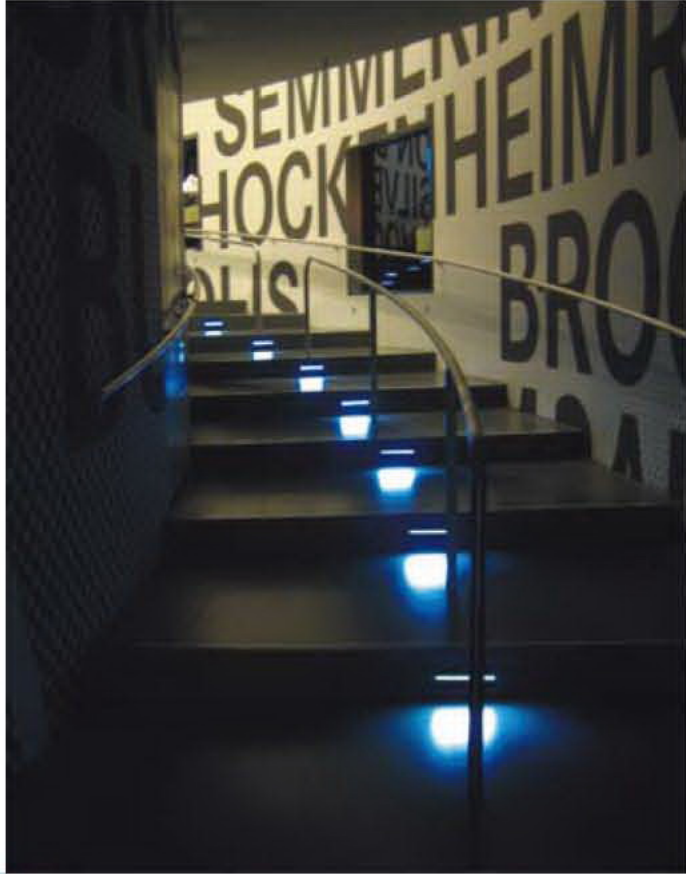

4472S+B

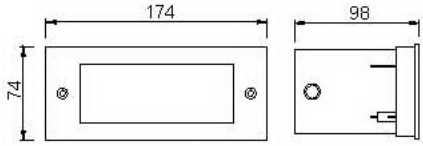

4471S+B




4471S+B



4472S+B



4473S+B



4471+B

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4471-4473S+B	G23		5W
4471-4473+B	G23		9W
	E27		Max.13W

IP54

材质及特性

- 压铸铝合金灯体;
- 磨砂钢化玻璃透光罩;
- 工程塑料预埋筒;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Frost tempered glass diffuser.
- Engineering plastic recessed box.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54







4503L+B



4485+B



4481M

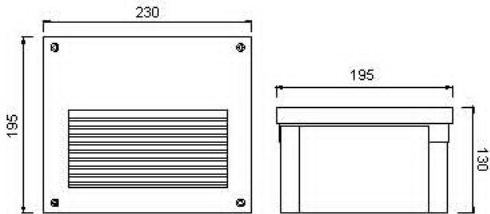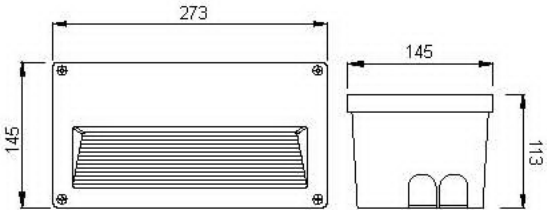

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4503L+B	G24d-1		26W
	E27		Max.15W
4485+B	G24d-1		26W


IP54

材质及特性

- 压铸铝合金灯体;
- 工程塑料预埋筒;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body, 304 stainless steel cover.
- Engineering plastic recessed box.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

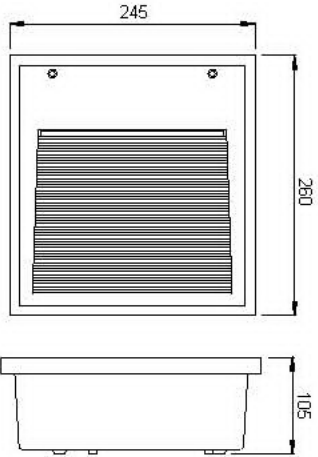

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4481M	G24d-1		26W
	Rx7s		70W
	E27		Max.26W

IP44

材质及特性

- 压铸铝合金灯体;
- 钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP44

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP44



4901-14W

4901-28W



4902-16W




4902-28W




光源(Lamp)	功率(Power)	灯体长度(Length)
T5	8W	337mm
T5	14W	597mm
T5	21W	897mm
T5	28W	1195mm
T5	35W	1497mm



光源(Lamp)	功率(Power)	灯体长度(Length)
T4	8W	415mm
T4	12W	515mm
T4	16W	565mm
T4	20W	605mm
T4	22W	810mm
T4	24W	945mm
T4	26W	1100mm
T4	28W	1250mm

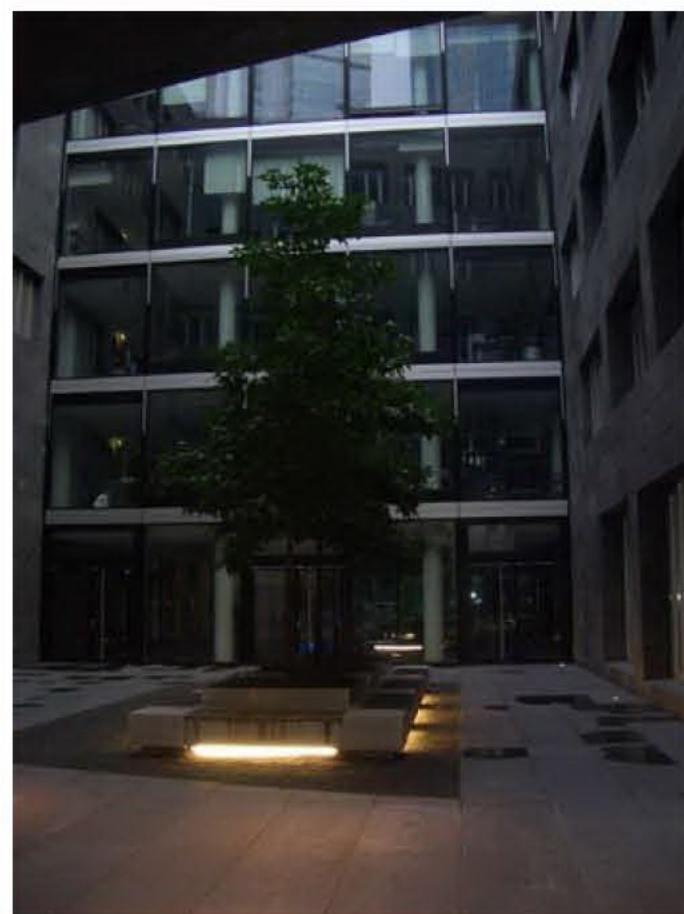

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4901	2*G5	T5	8~35W
		LED	




材质及特性

- 铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65

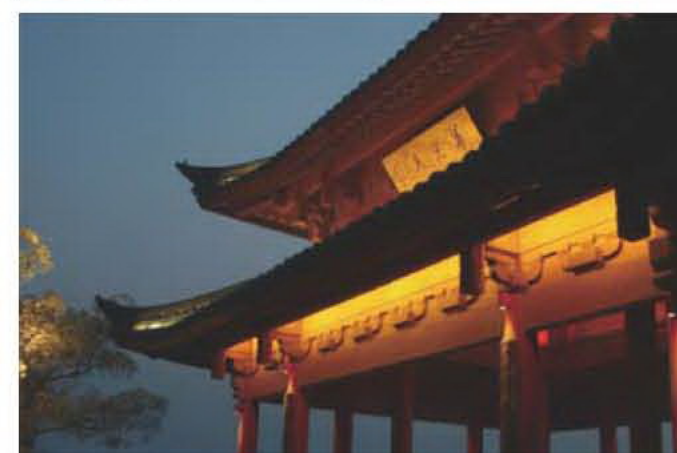

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
4902	2*G5	T4	8~28W
		LED	



材质及特性

- 铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



037072





037073



037074



037075

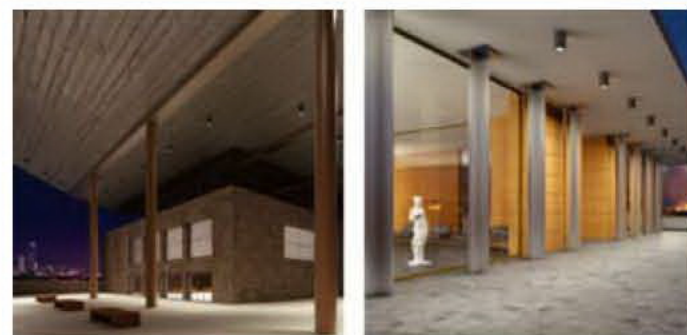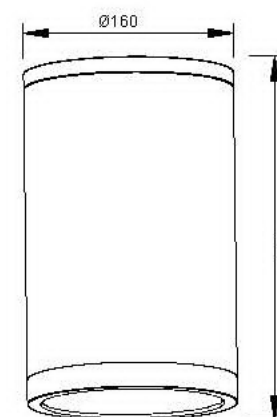

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
037072	E27		Max.9W
037073	E27		Max.15W
037074	E27		Max.26W


IP54

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54

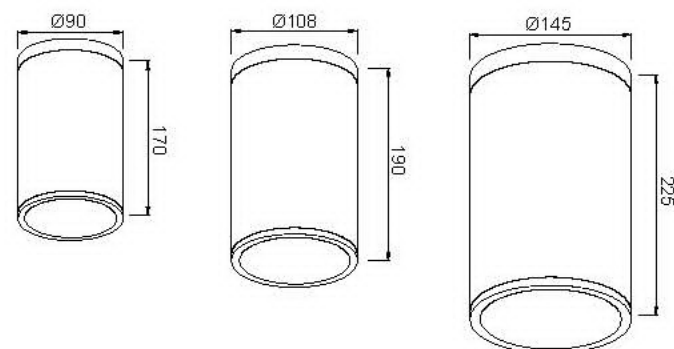

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
037075	G12		70W
	Rx7s		70W

IP54

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP54

Materials & Features

- Diecasting aluminum lamp body.
- Tempered clear glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP54



YDC55555



YDC55555



YDC55555



YDC55555



YDC55555



YDC55555



YDC55555




YDC55555



YDC55555



YDC55555

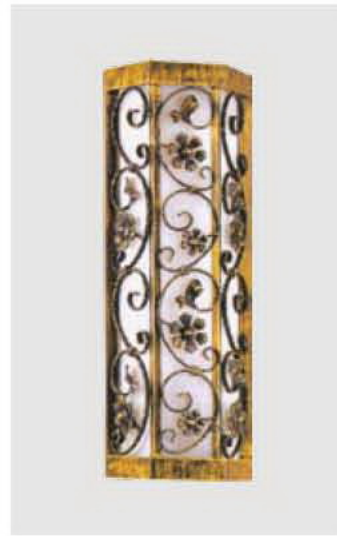

YDC55555




YDC55555



YDC55555



YDC55555

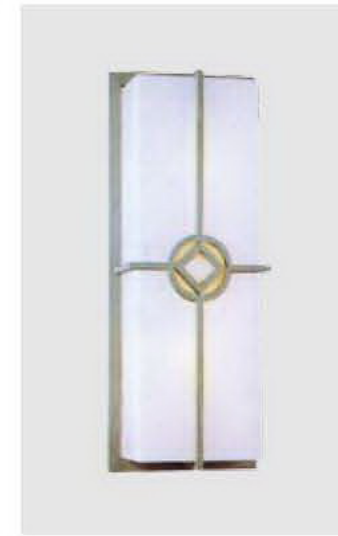

YDC55555



YDC55555



YDC55555




YDC55555



YDC55555



YDC55555

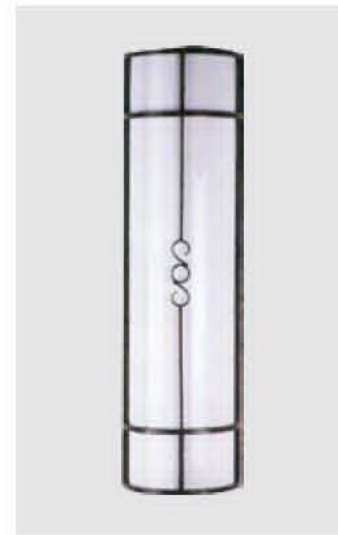

YDC55555



YDC55555



YDC55555



YDC55555