





9511



9512

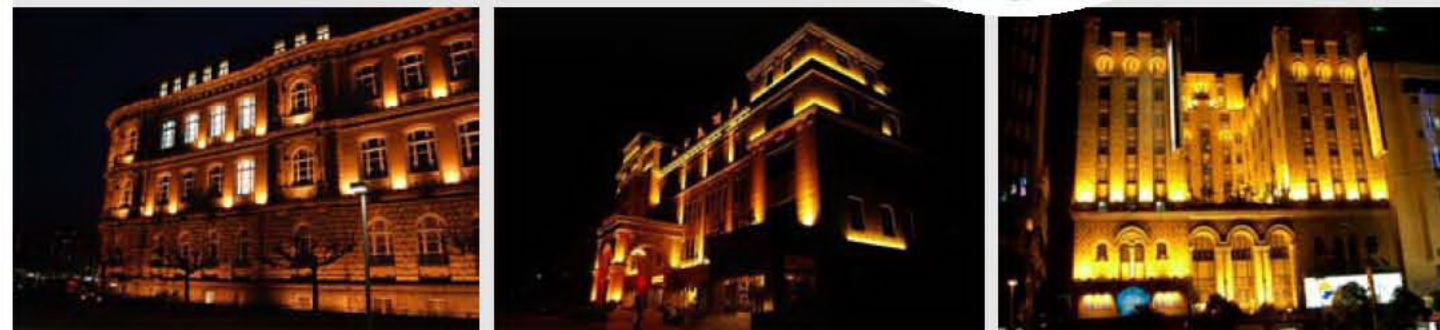

9513

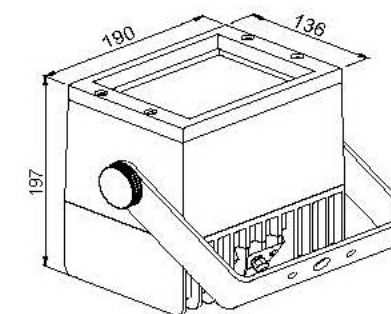

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
9511	G12		70W
9512	Rx7s		70W
9513	Rx7s		70W

IP65

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



YDC55555



YDC55555



YDC55555



型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
9521	G12		70/150W
9522	Rx7s		70/150W



IP65

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65

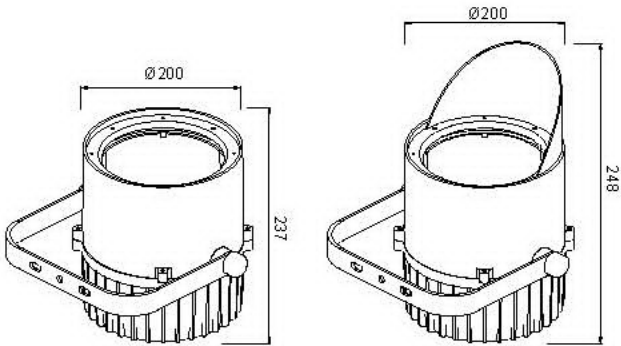

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	G12		70W

IP65

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65


Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65





23161

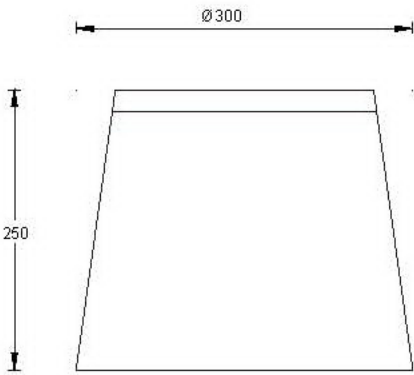

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	Rx7s		70/150W
	E27	HIT	150W

IP65

材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



YDC55555

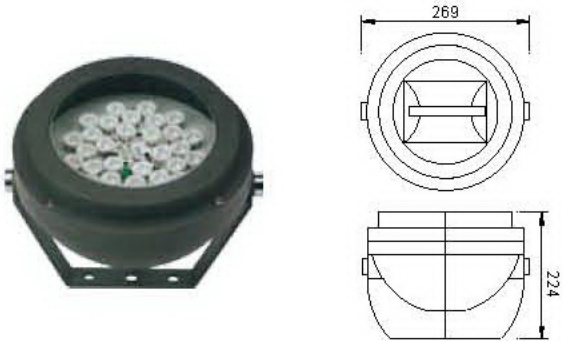

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
		LED	30W
	G12		70/150W

IP65

材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



9531

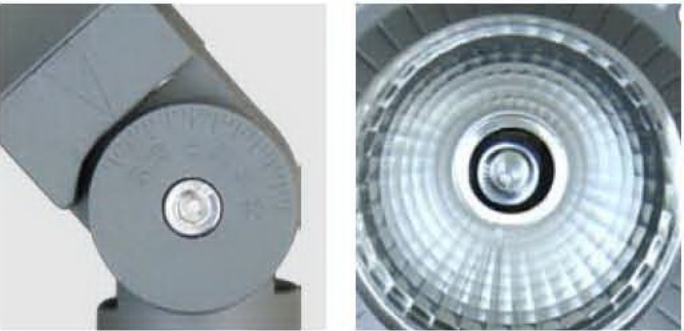

照射角度可以调节，垂直方向±60°，水平方向360°

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
9531	G12		70/150W

IP65

材质及特性


- 压铸铝合金灯体；
- 透明钢化玻璃透光罩；
- 高纯度铝阳极氧化反射器；
- 硅胶密封，耐高温，抗老化；
- 全不锈钢螺丝紧固；
- 户外专用塑粉，耐腐蚀，抗老化；
- 静电喷塑，喷涂均匀，附着力强；
- 防护等级：IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



YDC55555

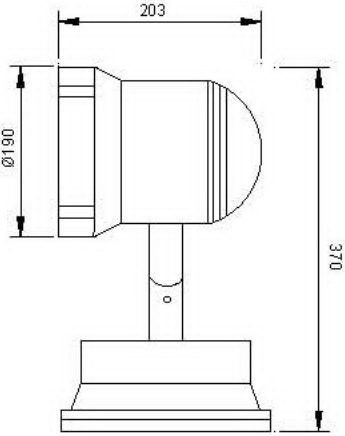

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
	G12		70/150W

IP65

材质及特性



- 压铸铝合金灯体；
- 透明钢化玻璃透光罩；
- 高纯度铝阳极氧化反射器；
- 硅胶密封，耐高温，抗老化；
- 全不锈钢螺丝紧固；
- 户外专用塑粉，耐腐蚀，抗老化；
- 静电喷塑，喷涂均匀，附着力强；
- 防护等级：IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



YDC55555

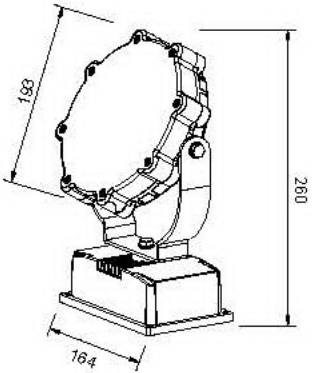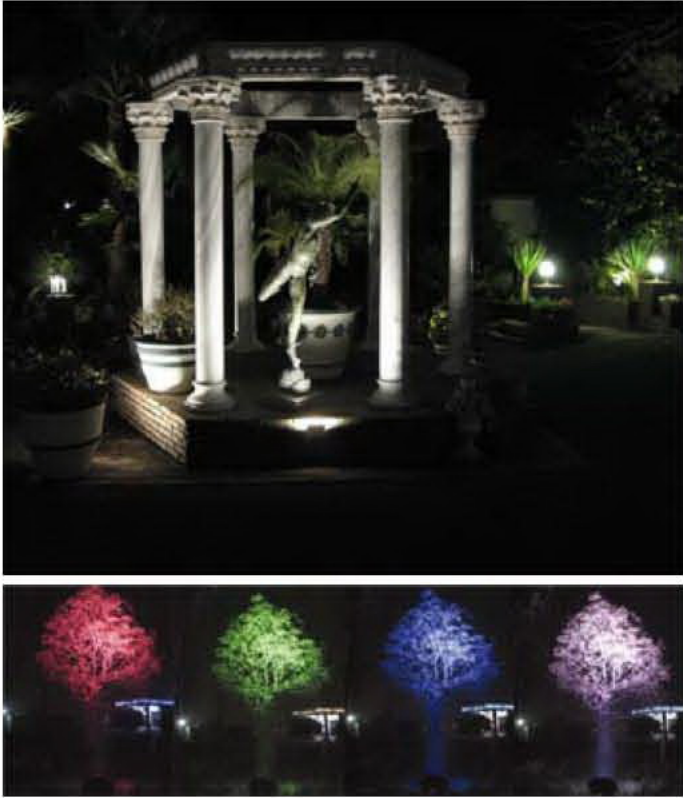

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
	LED		90~260V/50Hz

IP65

材质及特性


- 压铸铝合金灯体;
- PMMA透明透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- PMMA clear diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



YDC55555

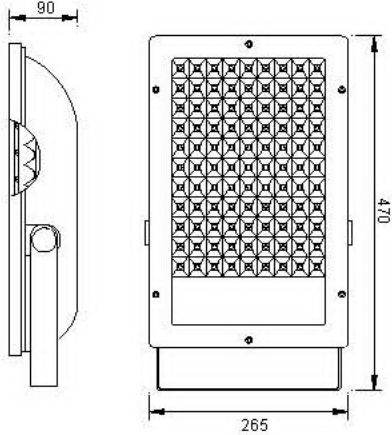

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
	LED	80*1W	

IP65

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65




5771DZ



5772DZ



5775DZ

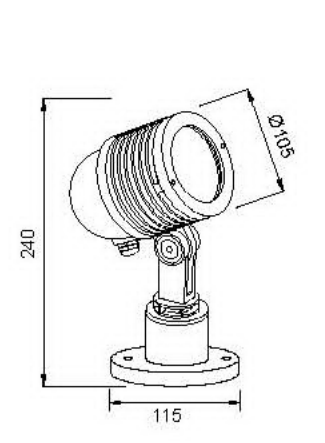


5771




5772



5775

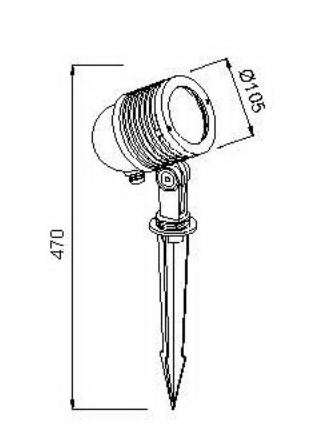

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
5771DZ 5772DZ 5775DZ	G5.3	MR16 1*3W	50W
	GU10	GU10 1*3W	50W
	E27	Par20 1*3W	50W



材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
5771 5772 5775	G5.3	MR16 1*3W	50W
	GU10	GU10 1*3W	50W
	E27	Par20 1*3W	50W



材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



5781




5781



5782



5783

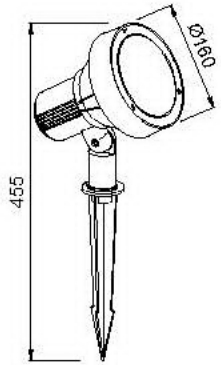

5781BC




5781BC



5782BC



5783BC



5781DZ




5781DZ



5782DZ



5783DZ



型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
5181-5783	E27		Max.26W
5181DZ-5783DZ	E27		Max.26W
5181BC-5783BC	G12		70W

IP65

材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features


- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65




3319

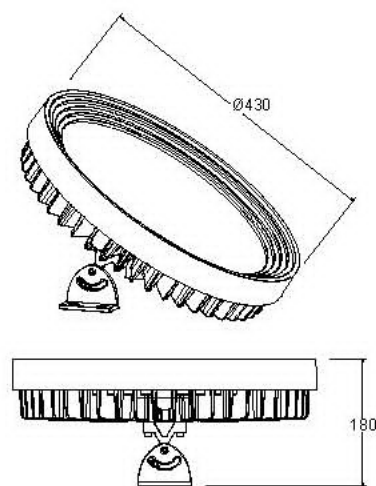


3010L

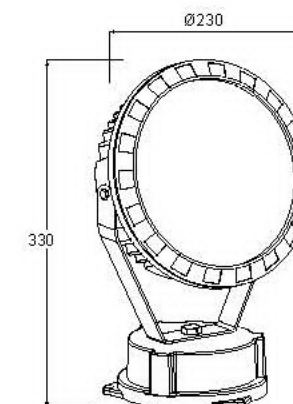


3313

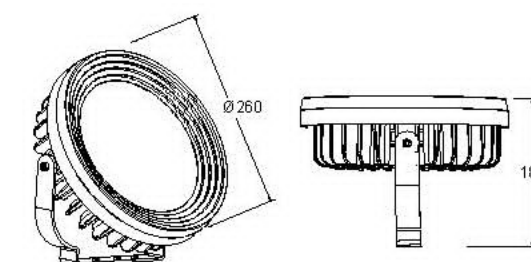

3312

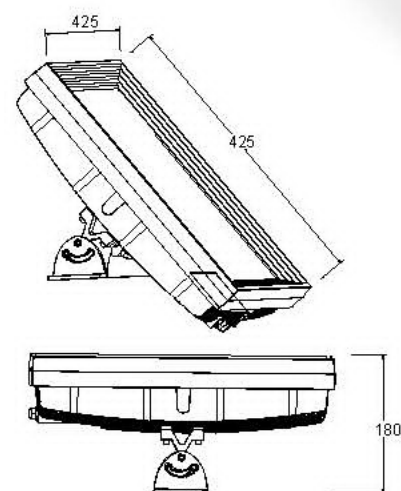

3316

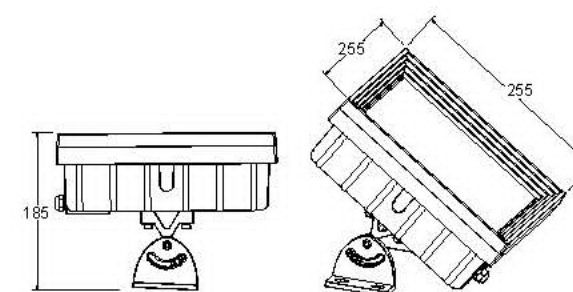

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3319	LED	100*1W	90-260V/50Hz
3312	LED	100*1W	90-260V/50Hz
3010L	LED	24*1W	90-260V/50Hz
3313	LED	21*1W	90-260V/50Hz
3316	LED	24*1W	90-260V/50Hz


IP65

材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Clear tempered glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65

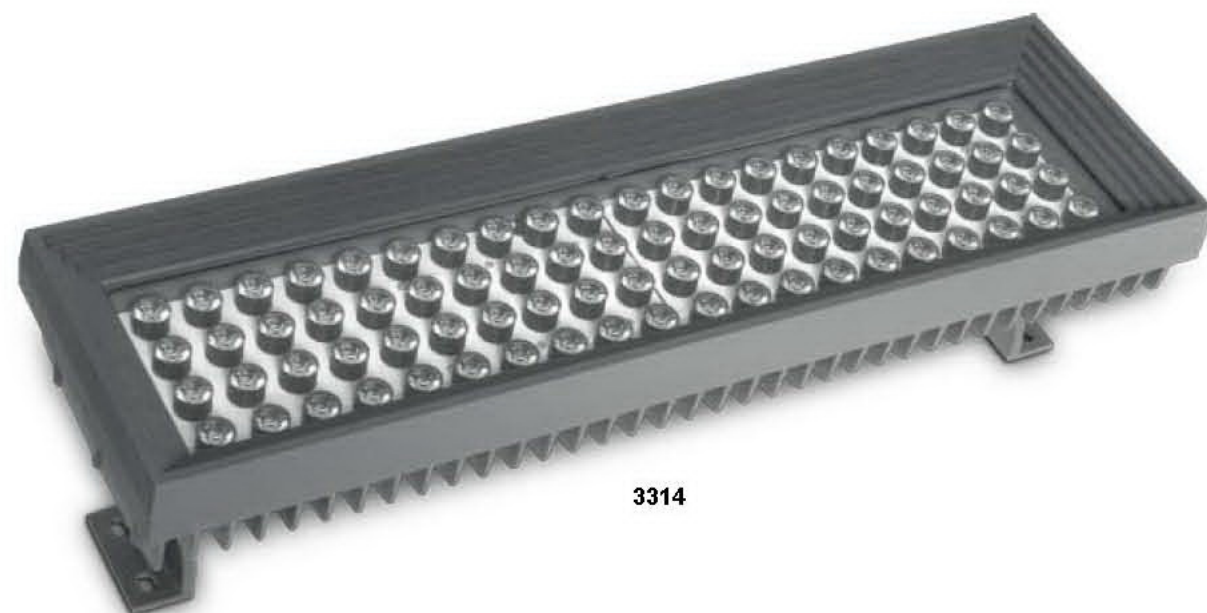

3314

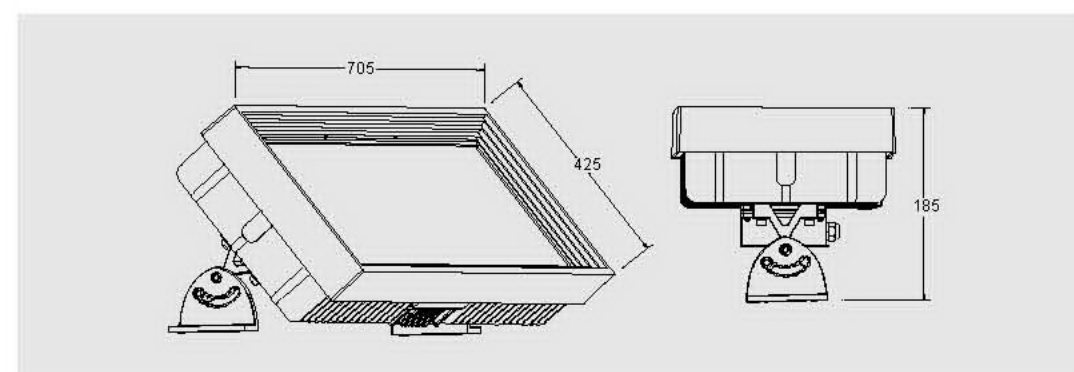



3315L



3317L



YDC55555

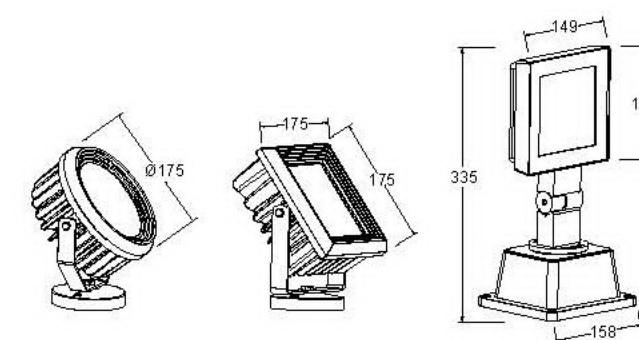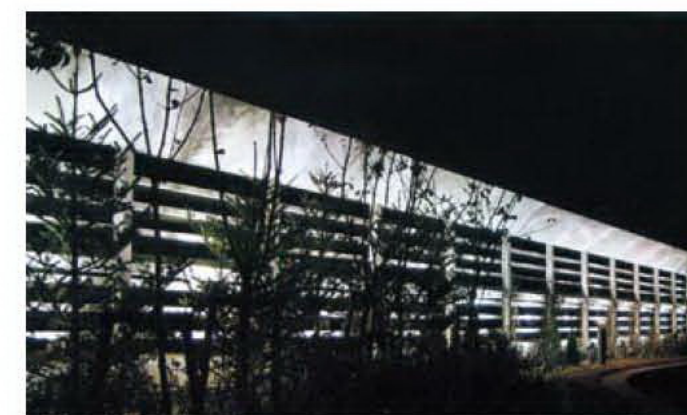

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3314	LED	80*1W	90-260V/50Hz
3315L	LED	9*1W	90-260V/50Hz
3317L	LED	11*1W	90-260V/50Hz
003322	LED	8*1W	90-260V/50Hz

IP65

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Clear tempered glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



3318L



3318S









3311S



3311M



3311L

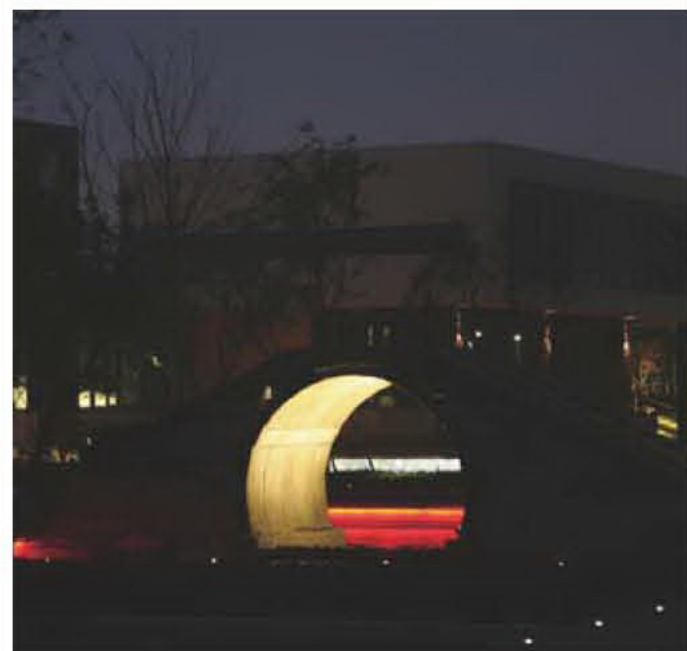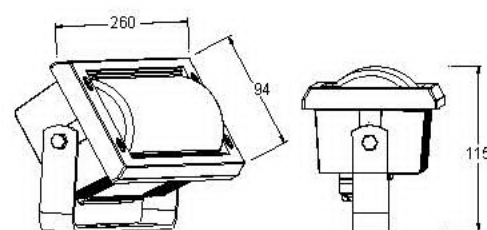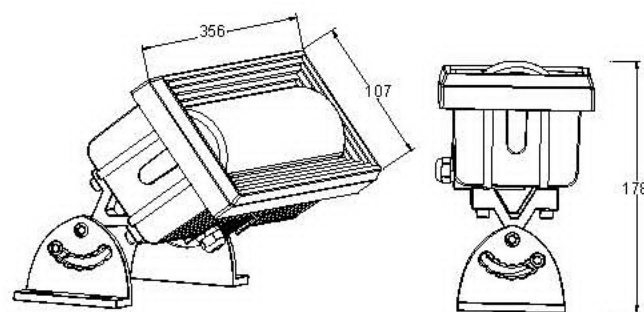

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3318S	LED	6*1W	90-260V/50Hz
3318L	LED	10*1W	90-260V/50Hz

IP65

材质及特性

- 压铸铝合金灯体;
- 磨砂玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Frost glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3311S	LED	5*1W	90-260V/50Hz
3311M	LED	9*1W	90-260V/50Hz
3311L	LED	15*1W	90-260V/50Hz

IP65

材质及特性

- 压铸铝合金灯体;
- 奶白PC透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Opal PC diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65




3315M



3317M



3321

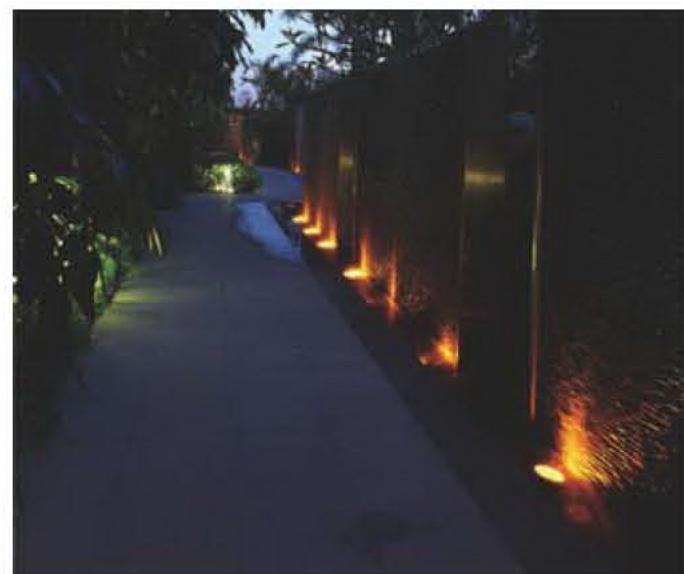


3317S




3315S



3323

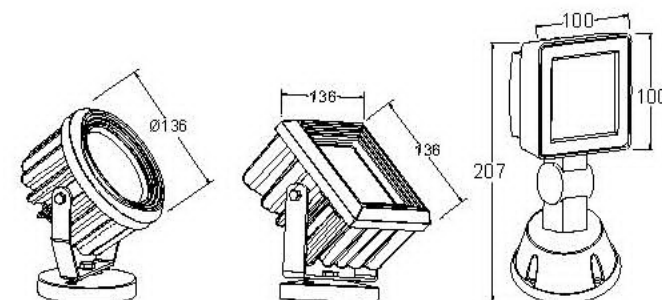

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3315M	LED	14*0.5W	90-260V/50Hz
3317M	LED	26*0.5W	90-260V/50Hz
3321	LED	10*0.5W	90-260V/50Hz




材质及特性


- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Clear tempered glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65

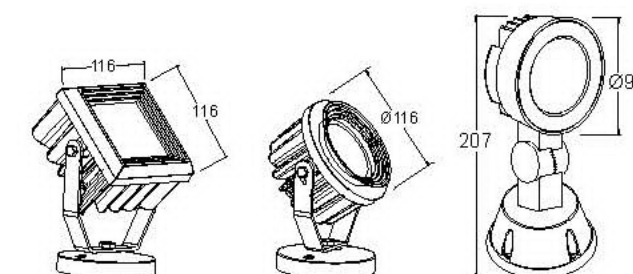

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3317S	LED	1*3W	90-260V/50Hz
3317M	LED	1*3W	90-260V/50Hz
3323	LED	1*3W	90-260V/50Hz



材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features


- Diecasting aluminum lamp body.
- Clear tempered glass diffuser.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



9503



9504

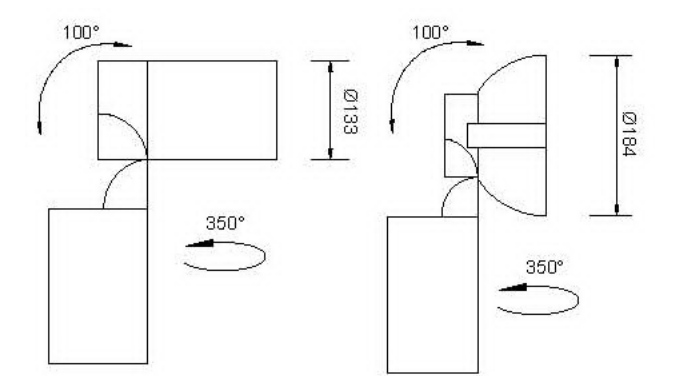

型号(Item)	灯座(Holder)	光源(Lamp)	功率(Power)
9503	Rx7s		70/150W
9504	G12		70/150W

IP65

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features


- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65



3005



3001

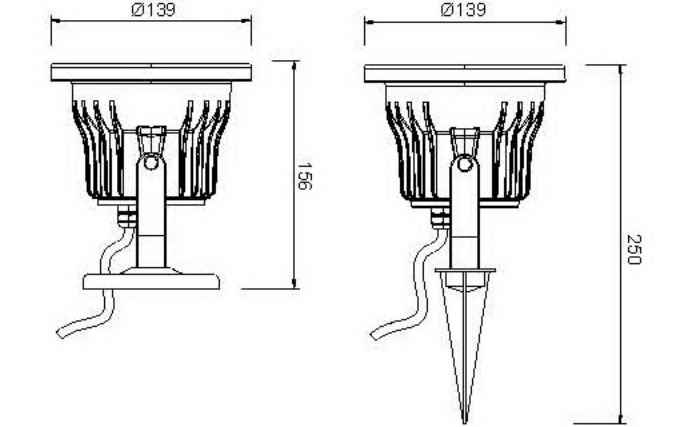

型号(Item)	光源(Lamp)	功率(Power)	电压(Voltage)
3005	LED	1*3W	90-260V/50Hz
3001	LED	1*3W	90-260V/50Hz

IP65

材质及特性

- 压铸铝合金灯体;
- 透明钢化玻璃透光罩;
- 高纯度铝阳极氧化反射器;
- 硅胶密封, 耐高温, 抗老化;
- 全不锈钢螺丝紧固;
- 户外专用塑粉, 耐腐蚀, 抗老化;
- 静电喷塑, 喷涂均匀, 附着力强;
- 防护等级: IP65

Materials & Features

- Diecasting aluminum lamp body.
- Tempered glass diffuser.
- Anodized aluminium reflector.
- Waterproof and durable silicone rubber gasket.
- Connecting elements stainless steel.
- Powder paint with high corrosion resistance.
- Electrostatic spraying.
- IP65